


# SPECIFICATIONS

## Features


- Super Compact Size & Competitive Cost
- Constant Current Output
- Dual ELV/TRIAC Dimmable
- Active Power Factor
- >80% Efficiency Full Load
- Class 2 compliance
- 5 Year Warranty

## Wiring Diagram

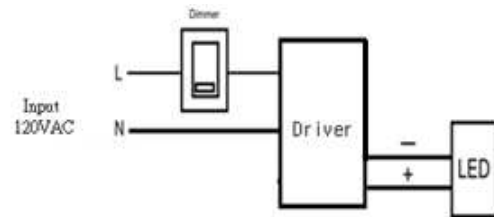

## Mechanical and Thermal

Dimension L 1.358" × W 2.776" × H 0.984"  
 Lead Wire Length 6" Standard  
 Max. Case Operation Temp. 80°C

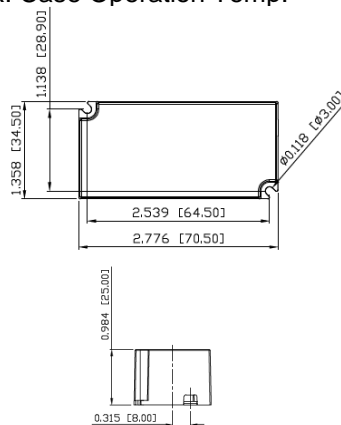

\* Dimension in Inch/Metric

## Electrical

Maximum Load	10W
Minimum Load	5W
Input Voltage	120V
Max Output Voltage/Current	37VDC/250mA
Power Factor	>0.90
Max. Harmonic Distortion	<20%
Efficiency	80 typ.
No Load Loss	<1 W

## Protection

- Overload protection
- Thermal protection
- Class 2

## Environmental Specifications

- MTBF >100,000 hrs
- RoHS Compliant
- Lead Free SMT process
- Power Factor Correction / Low Load
- FCC Class 2 Certified



Note –

1. UL file No.: E340871



Macron Associate Co. – Power Supply Team

NO.352, Peng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com

E1115