



Specter In-Track Adapter

GA-9409-1050-40-X-3-YY




UL File No: E340871
CE Certified


Adapter	Stucchi 9409-4-DRI/B
Compatible track system	-NA Globaltrac pro -Concord -Eutrac 25101 -Hoffmeister -IG STD 677 -Ivela -Stucchi -Unipro T3
LED Driver Specification	120-277 V, 250-1050 mA (DIP Switch) (See the page2-4)

Mechanical

* Dimension in metrics

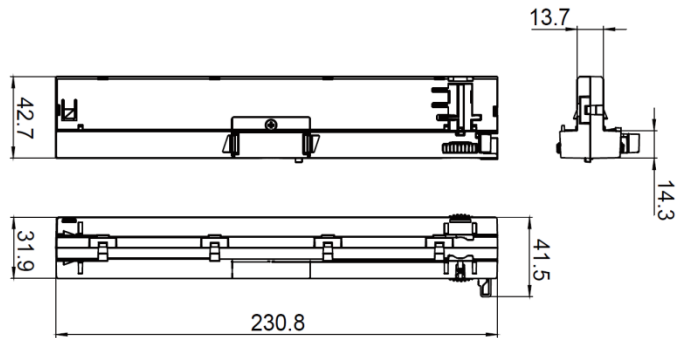

Installation Notes

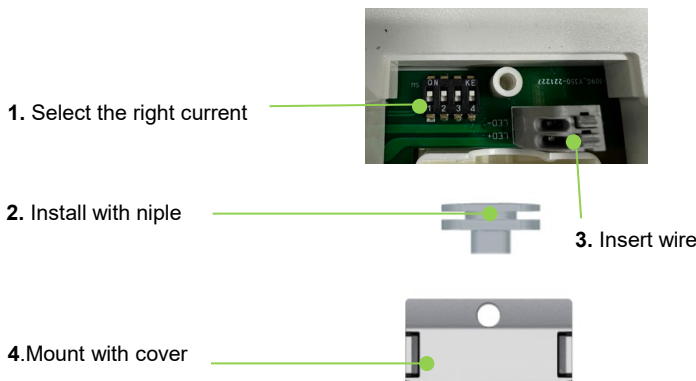

Example Fixture



1. Input - specification

	Units	Minimum	Typical	Maximum	Notes
Input Voltage Range(Vin)	Vac	108	120-277	304	
Input Frequency Range	Hz	50	60	63	
Input Power	W		49		
Power Factor(PF)		0.9	>0.9		From 100% to 80% of rated power
Input Current	A	-	-	0.41A@120VAC 0.18A@277VAC	
Inrush Current	A	Meet NEMA 410 requirements			See the inrush current information
Total Harmonics Distortion (THD)				20%	At nominal input voltage and nominal LED voltage
Efficiency		-	>80%	-	Efficiency is measured after driver has thermally stabilized + full load
Isolation	Meet UL1310/UL8750 for class 2 isolation power supply				

2. Output - specification

	Units	Minimum	Typical	Maximum	Notes
Output Voltage(Volt)	Vdc	15		40	
Output Current(Iout)	mA		250-1050		
Output Current Tolerance	%		±3		
Output Ripple Current	< 30% peak-to-peak of 250-1050 mA				<p>≤20% pk-to-pk of the rated output current for all models with Vout max ≥40V</p> <p>≤50% pk-to-pk of the rated output current for all models with Vout max ≤15V</p> <p>At nominal LED voltage and nominal input voltage without dimming</p>
Dimming Range	%	3%		100%	Please refer to Dimmer compatibility list
Star-up Time	ms		200-250		<ul style="list-style-type: none"> Measured at the Maximum load and normal input voltage. Complies with California title 24 and Energy star® luminaire specification.
Isolation	Meet UL1310/UL8750 for class 2 isolation power supply				
Operation Case Temperature	°C	-30		80C	
Audible Noise	dB	< 24dB Class A			

3. EMC / Protection / Compliance

Conducted and Radiated EMI		FCC CFR Title 47 Part 15 Class B and EN55015(CISPR 15) Class B compliant			
Immunity Compliance	ESD (Electrostatic Discharge)	IEC61000-4-2	6 kV contact discharge, 8 kV air discharge, level 3		
	Electrical Fast Transient	IEC61000-4-4	±2 kV on AC power port for 1 minute, ±1kV on signal/control lines		
	Surge	IEC61000-4-5	±2kV line to line/±2kV line to earth on AC power port, ±0.5kV for outdoor cables		
Transient Protection	Ring Wave		ANSI/IEEE c62.41-1-2002 & c62.41-2-2002 category A, 2.5kV ring wave		

Current Settings :

LED Current Tolerance over temperature and component variations is $\leq 5\%$ at any level.

The output current of the driver can be adjusted using the four dip switches provided on the top of the driver. The below pictures shows the switch positions required to set the current to different levels.

A out	1.05	0.95	0.90	0.80	0.80	0.70	0.65	0.55	0.75	0.65	0.60	0.50	0.50	0.40	0.35	0.25
1	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○
2	●	●	●	●	○	○	○	○	●	●	●	●	○	○	○	○
3	●	●	○	○	●	●	○	○	●	●	○	○	●	●	○	○
4	●	○	●	○	●	○	●	○	●	○	●	○	●	○	●	○

The driver will be shipped out of factory with all switches set to ON (1050mA).



Macron Associate Co. – Power Supply Team

NO.352, Perng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com

Custom Label

 **Macron Associate Co.**

V in	F(Hz)	A in	W in	A out	V out	W out
120-277	50/60	0.18-0.42	50 W	0.25-1.05	15-40 VDC	42 W
120-240	50/60	0.18-0.42	50 W	0.25-1.05	15-40 VDC	42 W


Input : 120-277V for North America ; 120-240V for Europe

Switch position ● ON ○ Off

A out	1.05	0.90	0.80	0.70	0.65	0.60	0.55	0.50	0.40	0.30	0.25
1	●	●	●	●	●	○	○	○	○	○	○
2	●	●	○	○	○	●	●	○	○	○	○
3	●	○	●	●	○	○	○	○	●	○	○
4	●	○	○	○	●	○	○	○	○	○	○

Model number : GA-9409-1050-40-X-3-YY

CLASS 2 Driver for LED Loads



Track adapter
produced by



UL Pending
Assembly in TAIWAN www.macrongroup.com



Macron Associate Co. – Power Supply Team

NO.352, Perng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com