



Specter In-Track Adapter

GA-9409-24-30-X-3-YY




UL File No: E340871

CE Certified

Adapter	Stucchi 9409-4-DRI/B
Compatible track system	-NA Globaltrac pro -Concord -Eutrac 25101 -Hoffmeister -IG STD 677 -Ivela -Stucchi -Unipro T3
LED Driver Specification	120-277 V, 1.2 A, 30W
Dimming	Non dimmable

Mechanical


* Dimension in metrics

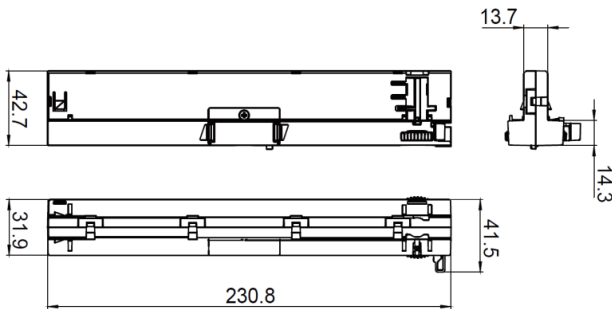

Electrical

Maximum load	30 W
Minimum load	3 W
Input Voltage	120-277V, 50/60 Hz
Output Voltage	24VDC
Output Current	1.2 A
Max. Harmonic Distortion	< 20 %
Efficiency	>80%
No Load loss	< 1 W
Max. Tc Temperature	80°C

Inrush Current Information

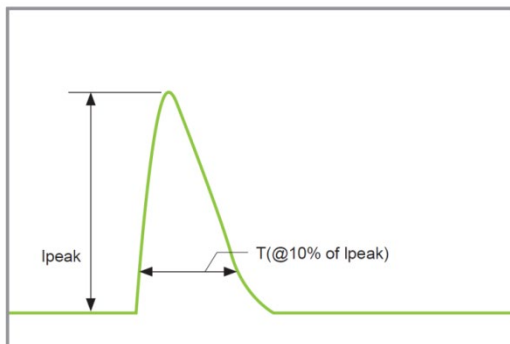

Vin	Ipeak	T(@50% of Ipeak)	Input Capacitance
120 Vrms	3.0A	220 μs	42μF/ 0.42μF
277 Vrms	3.07A	300 μs	13μF/ 0.42μF