



Specter In-Track Adapter

GA-9409-48-30-X-3-YY




UL File No: E340871

CE Certified

Adapter	Stucchi 9409-4-DRI/B
Compatible track system	-NA Globaltrac pro -Concord -Eutrac 25101 -Hoffmeister -IG STD 677 -Ivela -Stucchi -Unipro T3
LED Driver Specification	120-277 V, 0.63 A , 30W
Dimming	Non dimmable

Mechanical


* Dimension in metrics

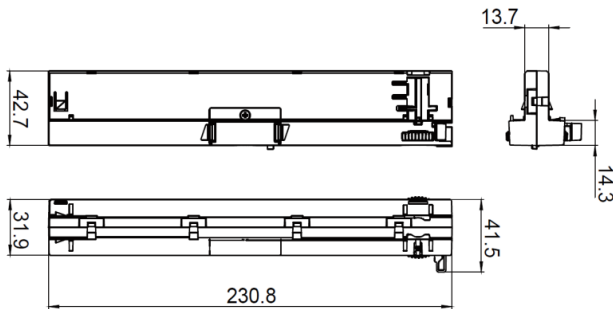

Electrical

Maximum load	30 W
Minimum load	3 W
Input Voltage	120-277V , 50/60 Hz
Output Voltage	48VDC
Output Current	0.63 A
Max. Harmonic Distortion	< 20 %
Efficiency	>80%
No Load loss	< 1 W
Max. Tc Temperature	80°C

Inrush Current Information

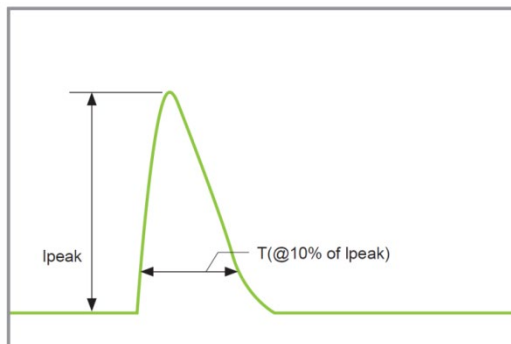

Vin	Ipeak	T(@10% of Ipeak)	Input Capacitance
120 Vrms	2.5A	112 μs	44μF/ 0.42μF
277 Vrms	3.1A	196 μs	13.65μF/ 0.42μF