



SPECIFICATIONS

MDR-505-48-100-J9

■ Features

- ✓ Constant Voltage Output
- ✓ Non Dimmable
- ✓ Class 2 Compliance
- ✓ Damp Location
- ✓ 5 Year Warranty


■ Protection

- Auto-reset electronic short circuit
- Overload protection
- Class 2
- Inherent Thermal Protection
- Hot Wire Protection

■ Environmental Specifications

- Operating Temperature -20° to 60°C
- Storage Temperature -20° to 70°C
- MTBF >100,000 hrs
- -Lead Free SMT process

■ Wiring Diagram



■ Electrical

Maximum Load	100W
Input Voltage	120~277V/50-60HZ
Output Voltage	48VDC
Output Current (max.)	2000mA
Power Factor	>0.90
Efficiency	80 typ.
No Load Loss	<1 W






Note-

1. UL file: E340871

■ Mechanical and Thermal

Dimensions L6.299" x W8.772" x H1.555"
 Weight 600g
 Lead Wire Length 6"

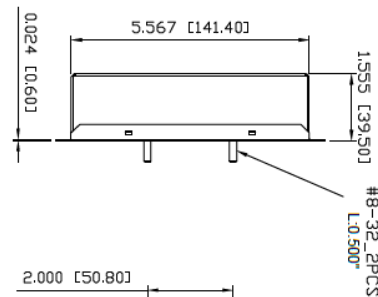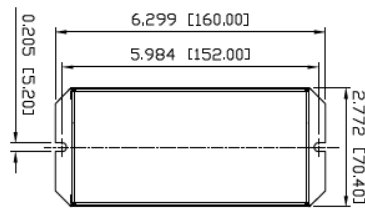

Dimension in Inch/ Metric

Macron Associate Co. – Power Supply Team

NO.352, Perng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com

B0718