


SPECIFICATIONS

Features


- Constant Current Output
- 0-10V Dimming
- Class II Compliance
- Damp Location
- 5 Year Warranty
- Hot Wire Protection
- Supporting DIM TO OFF Capability

Wiring Diagram

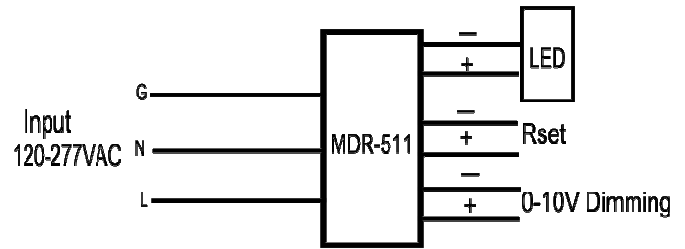

Mechanical and Thermal

Dimensions	L10.630" X W1.189" X H1.154"
Weight	200g
Lead Wire Length	Terminal block
Max. Case Operation Temp.	80°C

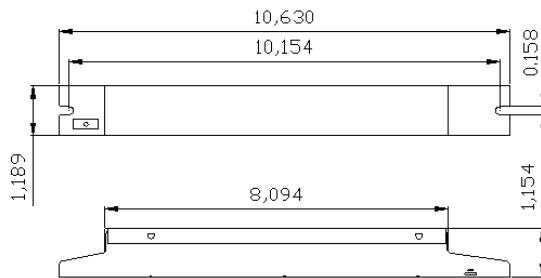

* Dimension in Inch

Protection


- Auto-reset electronic short circuit
- Overload protection
- Class II
- Inherent Thermal Protection
- Hot Wire Protection

Environmental Specifications

- Operating Temperature -20° to 60°C
- Storage Temperature -20° to 70°C
- MTBF >100,000 hrs
- Lead Free SMT process

Electrical

Maximum Load	40W
Input Voltage	120 – 277V/50-60Hz
Output Voltage	26-40VDC
Output Current	700-1000mA
Power Factor	>0.90 (18-40W)
Efficiency	80 typ.
No Load Loss	<1 W

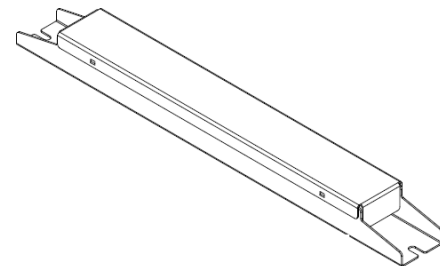

Note –

1. UL file No.: E340871
2. Driver is designated for “Stand by mode” at minimum light intensity (<0.8Vdc) power will not be OFF.



Macron Associate Co. – Power Supply Team

NO.352, Peng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com

A0314