


SPECIFICATIONS

Features


- Constant Current Output
- 0-10V Dimming
- Class II Compliance
- 5 Year Warranty
- Damp location
- How Wire Protection
- Supporting DIM TO OFF Capability
- Fine Tune for XICATO module

Wiring Diagram

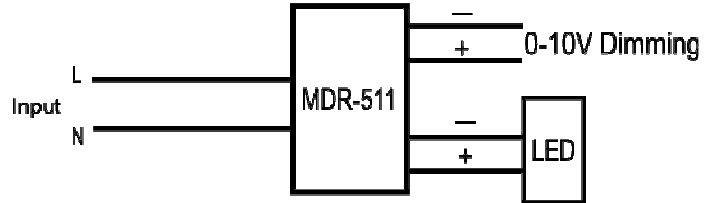

Mechanical and Thermal

Dimensions L5.709"XW1.811"XH1.260"
 Lead Wire Length Push In Connector
 Max. Case Operation Temp. 80°C

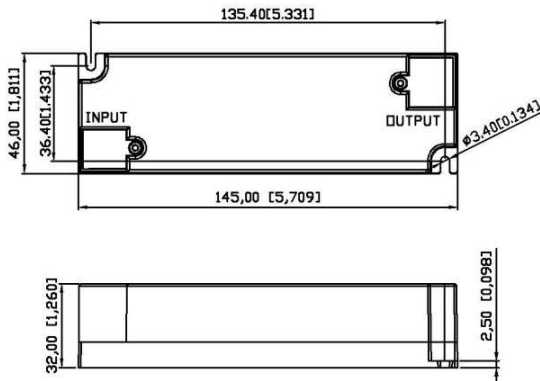

* Dimension in Metrix (inch)

Protection

- Auto-reset electronic short circuit
- Overload protection
- Inherent Thermal protection
- Class II

Environmental Specifications

- MTBF >100,000 hrs
- Lead Free SMT process
- Power Factor Correction / Low Load

Electrical

Maximum Load	40W
Input Voltage	120~277V/50-60HZ
Output Voltage	26-40VDC
Output Current (max.)	1000mA
Power Factor	>0.90 (26-40W)
Efficiency	80 typ.
No Load Loss	<1 W



Note –

1. UL File No. : E340871
2. Driver is designated for "Stand By mode" at minimum light intensity (<0.8Vdc) power will not be OFF.



Macron Associate Co. – Power Supply Team

NO.352, Peng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com

B1214