


SPECIFICATIONS

Features


- Work for most 3-wire/2-wire dimmer
- Compact size/Low Profile
- Constant Current Output
- Active Power Factor
- Class II compliance
- 5 Year Warranty
- Restart at Lowest Dimming setting

Wiring Diagram

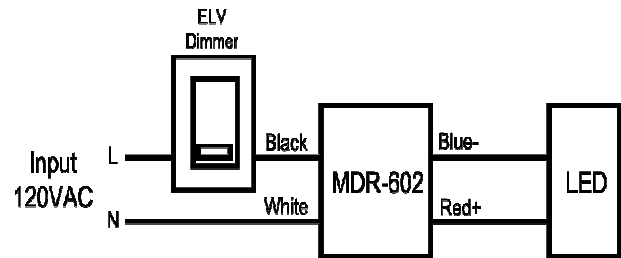

Mechanical and Thermal

Lead Wire Length 6" (Standard)

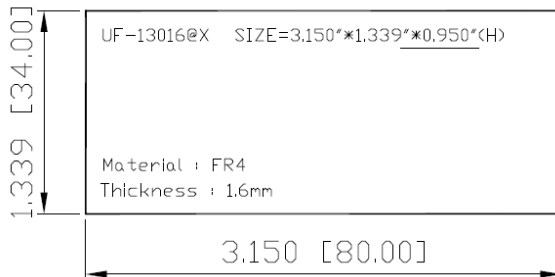

* Dimension in Inch/Metric

Protection

- Auto-reset electronic short circuit
- Overload protection
- Thermal protection
- Class II
- Cold Start

Environmental Specifications

- MTBF >100,000 hrs
- RoHS Compliant
- Lead Free SMT process
- Power Factor Correction / Low Load

Electrical

Maximum Load	16W
Minimum Load	11W
Input Voltage	120V
Max Output Voltage/Current	36VDC/450mA
Output Voltage Range	24-36VDC
Power Factor	>0.90
Max. Harmonic Distortion	<18%
Efficiency	80 typ.
No Load Loss	<1 W
TRIAC dimmable (2 wire & 3 wire dimmer) (see dimming compatibility)	

Note –

1. UL file number: E340871



Macron Associate Co. – Power Supply Team

NO.352, Peng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com

B1214