


SPECIFICATIONS

Features

- Ultra Compact Dimension
- Constant Current Output
- Dual ELV/TRIAC Dimmable
- Active Power Factor
- >80% Efficiency Full Load
- Class 2 Compliance
- 5 Year Warranty
- Restart at Lowest Dimming Level

Wiring Diagram


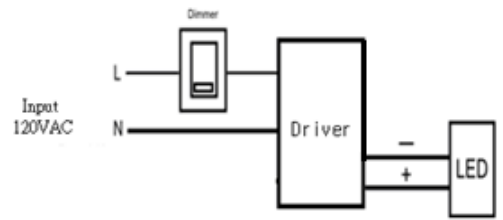


Mechanical and Thermal

Dimension L 2.17" × W 1.22" × H 0.79"

Lead Wire Length 6" Standard

Max. Case Operation Temp. 80°C



* Dimension in Inch/Metric

Protection

- Overload protection
- Thermal protection
- Class 2

Environmental Specifications

- MTBF >100,000 hrs
- RoHS Compliant
- Lead Free SMT process
- Power Factor Correction / Low Load

Electrical

Maximum Load	10W
Minimum Load	5W
Input Voltage	120V
Max Output Voltage/Current	10-14VDC/600mA
Power Factor	>0.90
Max. Harmonic Distortion	<20%
Efficiency	80 typ.
No Load Loss	<1 W

Note –

1. UL file No.: E340871



Macron Associate Co. – Power Supply Team

NO.352, Peng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com

A1115