


## Specification sheet

REV. 1

## Classic Cylinder 60 Cylinder, Adjustable, Surface

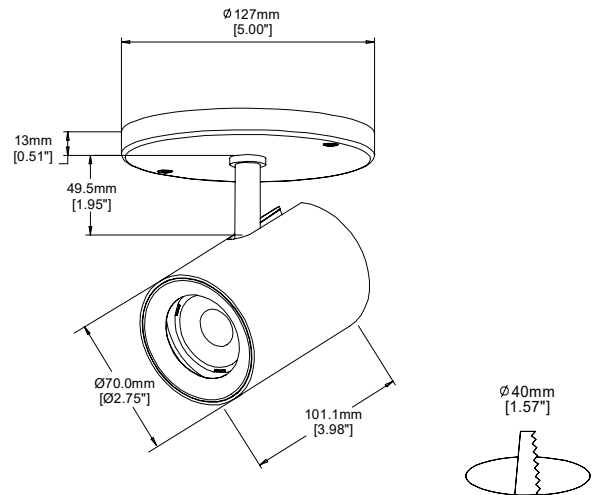

### Description

CC60CA features remote drivers with 3-in-1 dimming technology, twist-lock installation mechanism, best-in-class light quality, aesthetic proportions and many more. Classic Cylinder is designed to integrate with architectural space with clean and distinct outline that complement architectural aspiration.

### Features

|                          |                                                                |
|--------------------------|----------------------------------------------------------------|
| <b>LED</b>               | Bridgelux V6 / V10                                             |
| <b>Color temperature</b> | 2700K / 3000K / 3500K / 4000K                                  |
| <b>Optics</b>            | Narrow Spot 13° / Spot 22° / Medium 32° / Wide 43° / Flood 54° |
| <b>Accessories</b>       | Honey Comb Louver / Wall Wash                                  |
| <b>Driver</b>            | Integrated Class 2 driver, Power Factor >0.90                  |

### Performance

|                          |                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------|
| <b>Delivered output</b>  | Up to 1800 lm(90+ CRI)                                                              |
| <b>Power consumption</b> | 21 Watt                                                                             |
| <b>Color rendering</b>   | 90+CRI                                                                              |
| <b>Color consistency</b> | 3 SDCM                                                                              |
| <b>CBCP</b>              | Narrow Spot 19000 cd / Spot 9400 cd / Medium 6200 cd / Wide 3600 cd / Flood 2300 cd |

### Electrical and Control

|                      |                                     |
|----------------------|-------------------------------------|
| <b>Input voltage</b> | 120-277 V                           |
| <b>Control</b>       | TRIAC/ELV dimming on 120V           |
| <b>Feature</b>       | Overload & short circuit protection |

### Construction

|                 |                        |
|-----------------|------------------------|
| <b>Material</b> | Aluminum               |
| <b>Finishes</b> | Black/ White           |
| <b>Lens</b>     | Interchangeable optics |

### Rating/ Certification/ Warranty

- Dry and damp Locations
- RoHS compliant
- 5 years/ 50,000 hrs warranty

### Ordering Code Information


| PRODUCT                                               | COLOR TEMPERATURE                                                     | FINISH                     | BEAM ANGLE                                                          | CRI       | INPUT VOLTAGE                 |
|-------------------------------------------------------|-----------------------------------------------------------------------|----------------------------|---------------------------------------------------------------------|-----------|-------------------------------|
| CC 60 CA                                              | 27                                                                    | WH                         | NS                                                                  | 9         | 3E                            |
| Classic Cylinder 60,<br>Cylinder, Adjustable, Surface | 27 (2700K)<br>30 (3000K)<br>35 (3500K)<br>40 (4000K)<br>WD (Warm Dim) | WH ( White)<br>BK ( Black) | NS (10 deg)<br>S (15 deg)<br>M (24 deg)<br>W (36 deg)<br>F (50 deg) | 9 (90CRI) | 3E (120-277V,<br>ELV on 120V) |

## Photometrics

21W | 90CRI | 3000K


### Narrow Spot 13°

Delivered Output : 1138 lm | CBCP : 18699 cd | Beam Angle : 13°

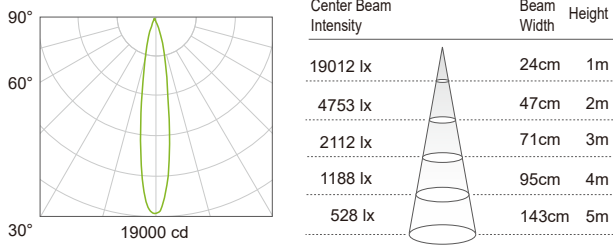


### Spot 22°

Delivered Output : 1767 lm | CBCP : 9363 cd | Beam Angle : 22°

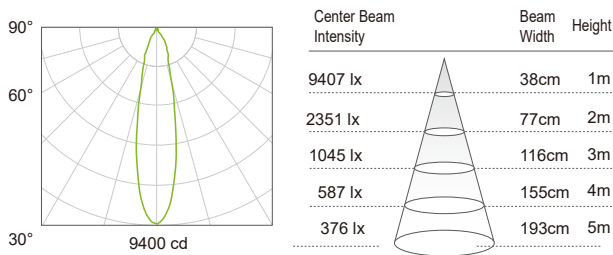


### Medium 32°

Delivered Output : 1876 lm | CBCP : 6191 cd | Beam Angle : 32°

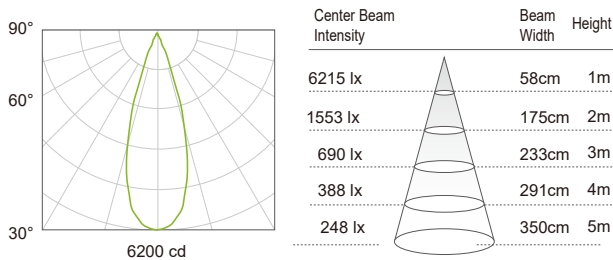


### Wide 43°

Delivered Output : 1833 lm | CBCP : 3597 cd | Beam Angle : 43°

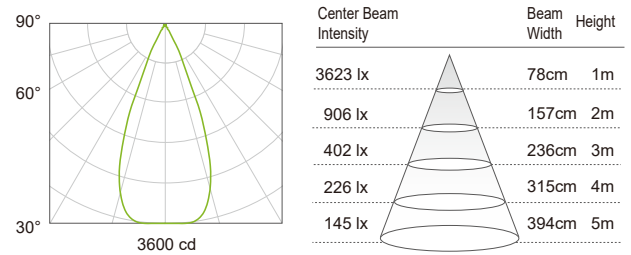

### Flood 54°

Delivered Output : 1797 lm | CBCP : 2284 cd | Beam Angle : 54°

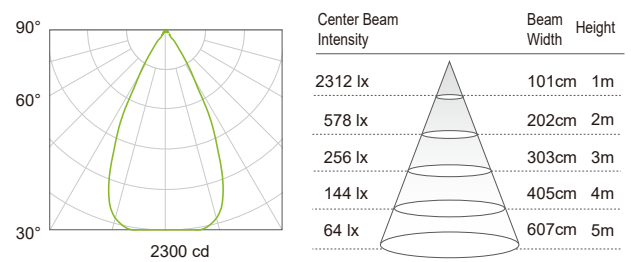

## Optional Accessory

