Specification sheet


REV. 2


CC60CT Classic Cylinder Track Spot


Global/Juno/Halo/Lightolier Compatible



1. Juno is a registered trademark of Juno Lighting
2. Halo is a registered trademark of Cooper Lighting
3. Lightolier is a registered trademark of Philips Lighting

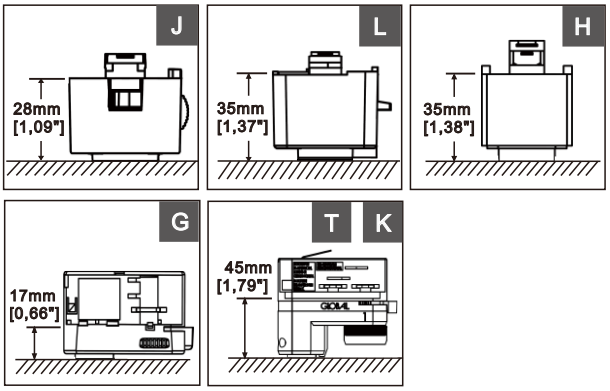

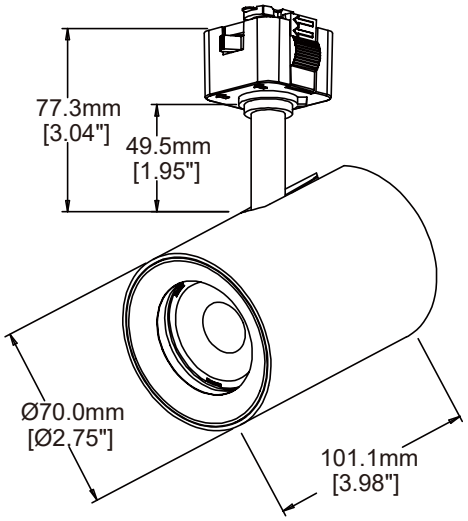



Description

CC60CT features integral LED Driver (phase dimmable on 120V) twist-lock installation mechanism, best-in-class light quality, aesthetic proportions and many more. Classic Cylinder is designed to integrate with architectural space with clean and distinct outline that complement architectural aspiration.

Electrical and Control

Input voltage	120-277 V
Control	TRIAC/ELV dimming on 120V
Feature	Overload & short circuit protection

Features

LED	Bridgelux V6 / V10
Color temperature	2700K / 3000K / 3500K / 4000K
Optics	Narrow Spot 13° / Spot 22° / Medium 32° / Wide 43° / Flood 54°
Accessories	Honey Comb Louver / Wall Wash
Driver	Integrated Class 2 driver, Power Factor ＞0.90

Construction

Material	Aluminum
Finishes	Black/ White
Lens	Interchangeable optics

Performance

Delivered output	Up to 1800 lm(90+ CRI)
Power consumption	21 Watt
Color rendering	90+CRI
CBCP	Narrow Spot 19000 cd / Spot 9400 cd / Medium 6200 cd / Wide 3600 cd / Flood 2300 cd

Rating/ Certification/ Warranty

- Dry Locations
- RoHS compliant
- UL classified (in process)
- 5 years/ 50,000 hrs warranty

2026.06.24 Copyright © Macron.
All technical information in this document is subject to change.
41146 #352, Perng-Yi Road,
Taiping, Taichung, Taiwan R.O.C.
tel +886-4-2270-8357 fax +886-4-2774516

Macron Associate
www.macrongroup.com
Modernize Luminary with LED

Ordering Code Information


PRODUCT	TRACK SYSTEM	COLOR TEMPERATURE	FINISH	BEAM	CRI	INPUT VOLTAGE
CC60CT	J	27	WH	NS	9	3E
Classic Cylinder 60Track	**H** Halo track compatible **J** Juno track compatible **L** Lightolier track compatible **G** Global-3 circuit, GA69 **K** Global HTEK HTEK100 **T** Global TEK TEK100	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K) WD (Warm Dim)	WH (White) BK (Black)	NS (13 deg) S (22 deg) M (32 deg) W (43 deg) F (54 deg)	9 (90CRI)	3E (120-277V, ELV on 120V)

Photometrics

21W | 90CRI | 3000K

Narrow Spot 13º


Delivered Output : 1138 lm | CBCP : 18699 cd | Beam Angle : 13º



Center Beam Intensity	Beam Width	Height
19012 lx	24cm	1m
4753 lx	47cm	2m
2112 lx	71cm	3m
1188 lx	95cm	4m
528 lx	143cm	5m

Wide 43º


Delivered Output : 1833 lm | CBCP : 3597 cd | Beam Angle : 43º



Center Beam Intensity	Beam Width	Height
3623 lx	78cm	1m
906 lx	157cm	2m
402 lx	236cm	3m
226 lx	315cm	4m
145 lx	394cm	5m

Spot 22º


Delivered Output : 1767 lm | CBCP : 9363 cd | Beam Angle : 22º



Center Beam Intensity	Beam Width	Height
9407 lx	38cm	1m
2351 lx	77cm	2m
1045 lx	116cm	3m
587 lx	155cm	4m
376 lx	193cm	5m

Flood 54º


Delivered Output : 1797 lm | CBCP : 2284 cd | Beam Angle : 54º



Center Beam Intensity	Beam Width	Height
2312 lx	101cm	1m
578 lx	202cm	2m
256 lx	303cm	3m
144 lx	405cm	4m
64 lx	607cm	5m

Medium 32º


Delivered Output : 1876 lm | CBCP : 6191 cd | Beam Angle : 32º




Center Beam Intensity	Beam Width	Height
6215 lx	58cm	1m
1553 lx	175cm	2m
690 lx	233cm	3m
388 lx	291cm	4m
248 lx	350cm	5m

Optional Accessory


Snoot Item : **CC60SN-XX**

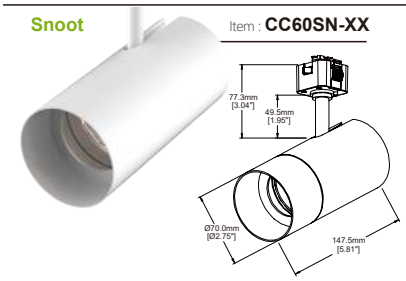

Cross Baffle Item : **CC60CB-XX**

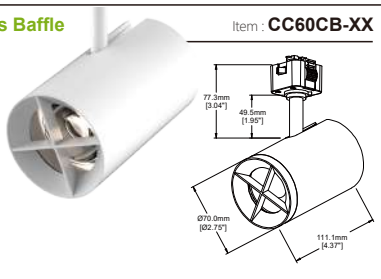

WALL WASH Item : **VS3-WWBZ-WH**

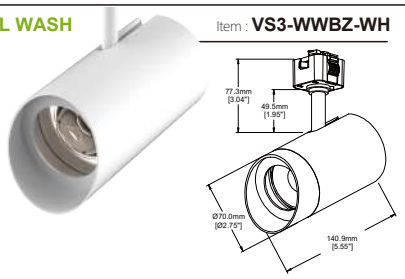

2026.06.24 Copyright © Macron.
All technical information in this document is subject to change.

41146 #352, Perng-Yi Road,
Taiping, Taichung, Taiwan R.O.C.
tel +886-4-2270-8357 fax +886-4-2774516

Macron Associate
www.macrongroup.com
Modernize Luminary with LED