
Specification sheet


REV. 1

CC90CT Classic Cylinder Track Spot (Global / Juno /Halo)

1. Juno is a registered trademark of Juno Lighting
2. Halo is a registered trademark of Cooper Lighting
3. Lightolier is a registered trademark of Philips Lighting



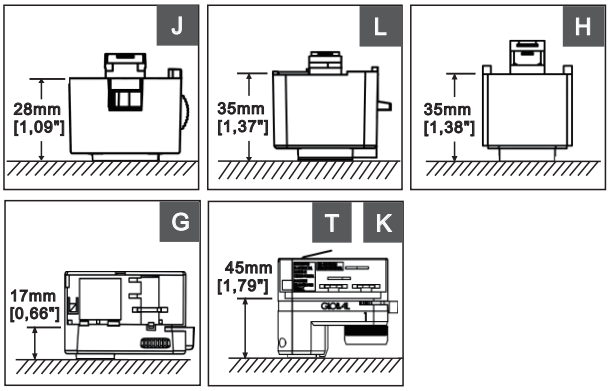

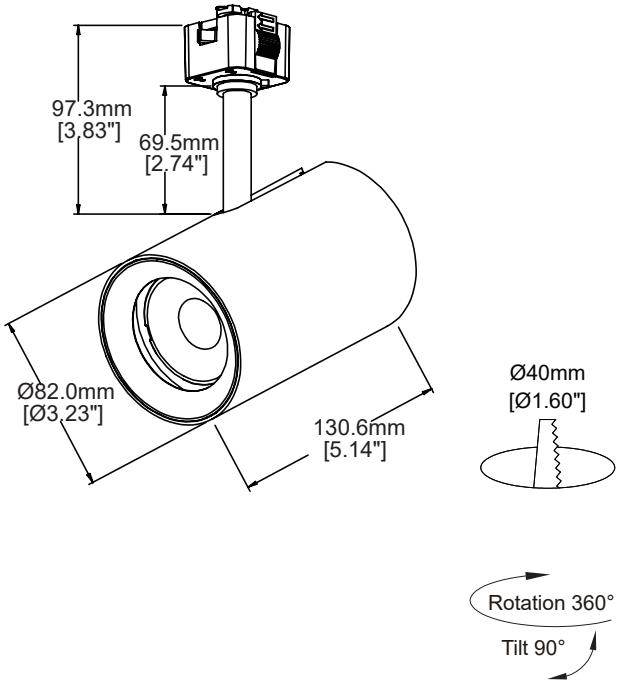

Description

CC90CT features remote drivers with 3-in-1 dimming technology, twist-lock installation mechanism, best-in-class light quality, aesthetic proportions and many more. Classic Cylinder is designed to integrate with architectural space with clean and distinct outline that complement architectural aspiration.

Electrical and Control

Input voltage	120-277 V
Control	TRIAC/ELV dimming on 120V
Feature	Overload & short circuit protection

Features

LED	Bridgelux V10 / V13
Color temperature	2700K / 3000K / 3500K / 4000K
Optics	Narrow Spot 17° / Spot 25° / Medium 31° / Wide 44° / Flood 56°
Accessories	Honey Comb Louver / Wall Wash
Driver	Integrated Class 2 driver, Power Factor ＞0.90

Construction

Material	Aluminum
Finishes	Black/ White
Lens	Interchangeable optics

Performance

Delivered output	Up to 3100 lm(90+ CRI)
Power consumption	30 Watt
Color rendering	90+CRI
CBCP	Narrow Spot 18300 cd / Spot 13000 cd / Medium 9800 cd / Wide 5100 cd / Flood 3500 cd

Rating/ Certification/ Warranty

- Dry Locations
- RoHS compliant
- UL classified
- 5 years/ 50,000 hrs warranty

2024.06.14 Copyright © Macron.
All technical information in this document is subject to change.
41146 #352, Perng-Yi Road,
Taiping, Taichung, Taiwan R.O.C.
tel +886-4-2270-8357 fax +886-4-2774516

Macron Associate
www.macrongroup.com
Modernize Luminary with LED

Ordering Code Information


PRODUCT	TRACK SYSTEM	COLOR TEMPERATURE	FINISH	BEAM	CRI	INPUT VOLTAGE
CC90CT	J	27	WH	NS	9	3E
Classic Cylinder 90Track	**H** Halo track compatible **J** Juno track compatible **L** Lightolier track compatible **G** Global-3 circuit, GA69 **K** Global HTEK HTEK100 **T** Global TEK TEK100	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K) WD (Warm Dim)	WH (White) BK (Black)	NS (17 deg) S (25 deg) M (31 deg) W (44 deg) F (56 deg)	9 (90CRI)	3E (120-277V, ELV on 120V)

Photometrics

30W | 90CRI | 3000K

Narrow Spot 17º


Delivered Output : 2089 lm | CBCP : 18280 cd | Beam Angle : 17º



Center Beam Intensity	Beam Width	Height
18997 lx	30cm	1m
4749 lx	59cm	2m
2110 lx	89cm	3m

Wide 44º


Delivered Output : 3064lm | CBCP : 5107 cd | Beam Angle : 44º



Center Beam Intensity	Beam Width	Height
5157 lx	80cm	1m
1289 lx	161cm	2m
573. lx	243cm	3m
322 lx	323cm	4m
206 lx	404cm	5m

Spot 25º


Delivered Output : 3109 lm | CBCP : 12847 cd | Beam Angle : 25º



Center Beam Intensity	Beam Width	Height
13037 lx	44cm	1m
3259 lx	88cm	2m
1449 lx	132cm	3m
815 lx	176cm	4m
521 lx	220cm	5m

Flood 56º


Delivered Output : 2980 lm | CBCP : 3475 cd | Beam Angle : 56º



Center Beam Intensity	Beam Width	Height
3506 lx	104cm	1m
876 lx	208cm	2m
389 lx	312cm	3m
219 lx	520cm	4m
140 lx	624cm	5m

Medium 31º


Delivered Output : 3069 lm | CBCP : 9798 cd | Beam Angle : 31º




Center Beam Intensity	Beam Width	Height
9798 lx	56cm	1m
2449 lx	111cm	2m
1088 lx	167cm	3m
612 lx	223cm	4m
392 lx	279cm	5m

Optional Accessory


Snoot Item : **CC90SN-XX**

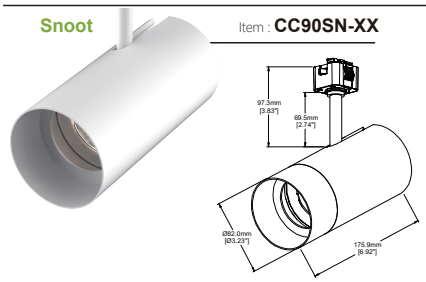

Cross Baffle Item : **CC90CB-XX**

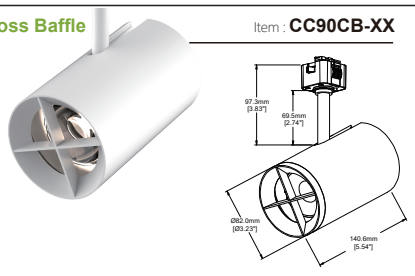

WALL WASH Item : **CC90WW-XX**

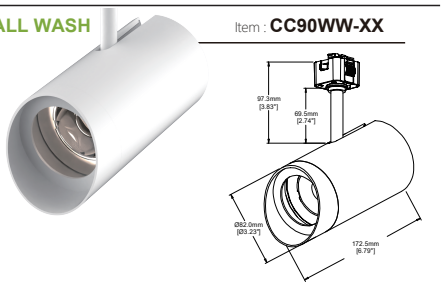

www.macrongroup.com
2024.06.14 Copyright © Macron.
All technical information in this document is subject to change.

41146 #352, Perng-Yi Road,
Taiping, Taichung, Taiwan R.O.C.
tel +886-4-2270-8357 fax +886-4-2774516

Macron Associate
www.macrongroup.com
Modernize Luminary with LED