Specification sheet


REV. 1


CC90PRJ Classic Cylinder 90 Projector Track


1. Juno is a registered trademark of Juno Lighting
2. Halo is a registered trademark of Cooper Lighting
3. Lightolier is a registered trademark of Philips Lighting



SHOWN IN JUNO ADAPTER

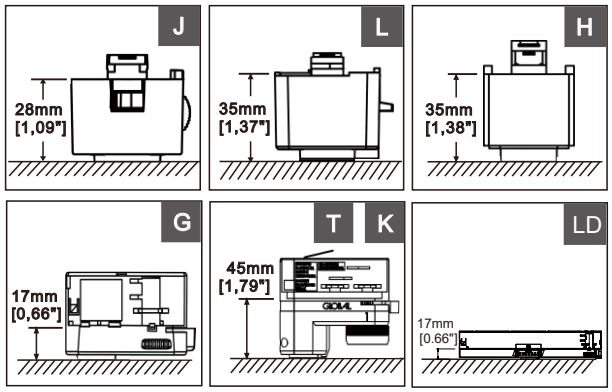

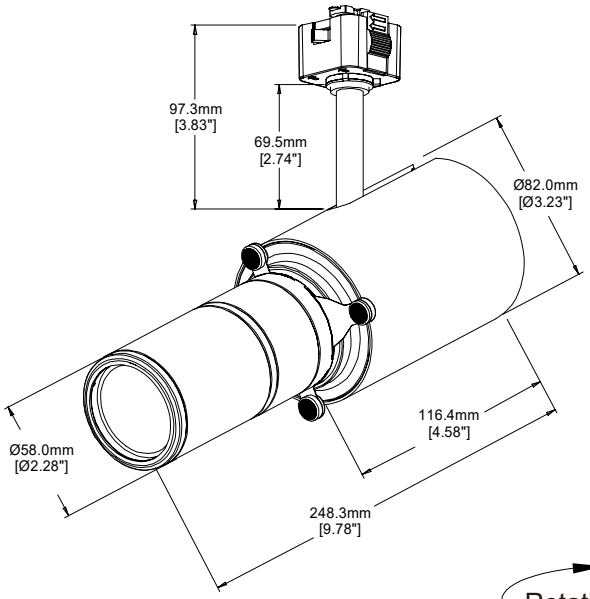



Description

Classic Cylinder Projector is ideally for exhibitions, art piece and other objects where precise control of lighting is required.

1. Continuously adjustable focus lenses: This Features allow the user to adjust the focus of the spotlight to clearly define the boundaries of the artwork.
2. Four contour sliders: These sliders adjust the shape and size of the lighting surface, allowing the user to create any shape with four corners.
3. Dust-free throughout the entire focal length. regardless of sharp light or soft light, the display is free of noise, distortion, and blue edges.

Features

LED	Bridgelux V10
Color temperature	2700K/3000K/4000K
Optics	Narrow Spot 15° / Medium 36°
Driver	Integrated Class 2 driver, Power Factor ＞0.90
Lens properties	Zoom range 15~36°

Performance

Delivered output	Up to 900 lm(90+ CRI)
Power consumption	31 Watt
Color rendering	90+CRI

Electrical and Control

Input voltage	120-277 V
Control	TRIAC/ELV dimming on 120V (Local Dim is integrated into the fixture, not dim by any remote device)
Feature	Overload & short circuit protection

Construction

Material	Aluminum
Finishes	Black/ White
Lens	Interchangeable optics

Rating/ Certification/ Warranty

- Dry and damp Locations
- RoHS compliant
- UL classified
- 5 years/ 50,000 hrs warranty

2024.06.26 Copyright © Macron.
All technical information in this document is subject to change.
41146 #352, Perng-Yi Road,
Taiping, Taichung, Taiwan R.O.C.
tel +886-4-2270-8357 fax +886-4-2774516

MACRON
Architectural Lighting

Ordering Code Information


PRODUCT	TRACK SYSTEM	COLOR TEMPERATURE	FINISH	CRI	INPUT VOLTAGE/DIM
CC90PRJ	J	27	WH	9	3E
Classic Cylinder 60 Projector	**H** (Halo track compatible) **J** (Juno track compatible) **L** (Lightolier track compatible) **G** (Global -3 circuit, GA69) **K** (Global HTEK100) **T** (Global TEK100) **LD** (Not dimmable for any remote device)	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K)	WH (White) BK (Black)	9 (90CRI)	3E (120-277V, ELV on 120V, on H/J/L/G/K/T track system) 3(for-LD)

Photometrics

31W | 90CRI | 3000K

Narrow Spot 15º


Delivered Output : 484 lm | CBCP : 10115 cd | Beam Angle : 15º



Center Beam Intensity	Beam Width	Height
10537 lx	22 cm	1m
2634 lx	44 cm	2m
1170 lx	65 cm	3m
658 lx	87cm	4m
421 lx	108cm	5m


Medium 36º

Delivered Output : 912 lm | CBCP : 3669 cd | Beam Angle : 36º




Center Beam Intensity	Beam Width	Height
3700 lx	61 cm	1m
920 lx	121 cm	2m
400 lx	182 cm	3m
230 lx	243 cm	4m
150 lx	305 cm	5m


Beam Spread

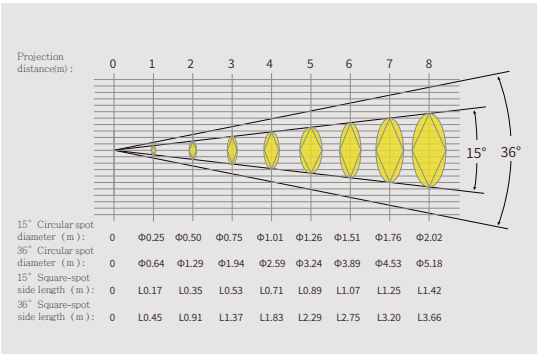


Beam Shapes

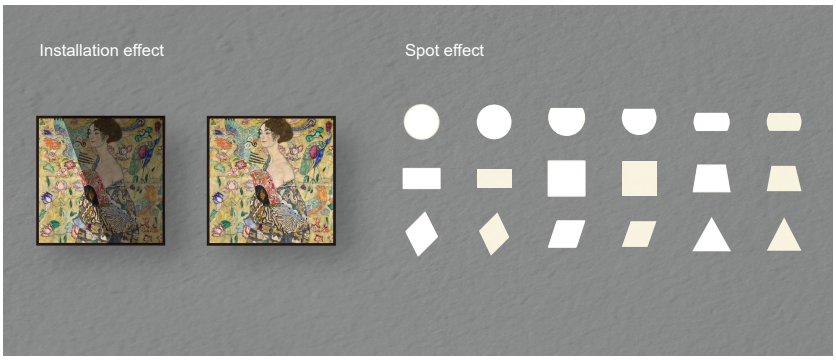

Dimension for Local Dim Version (CC90PRJ-LD-XX-XX-9-3)

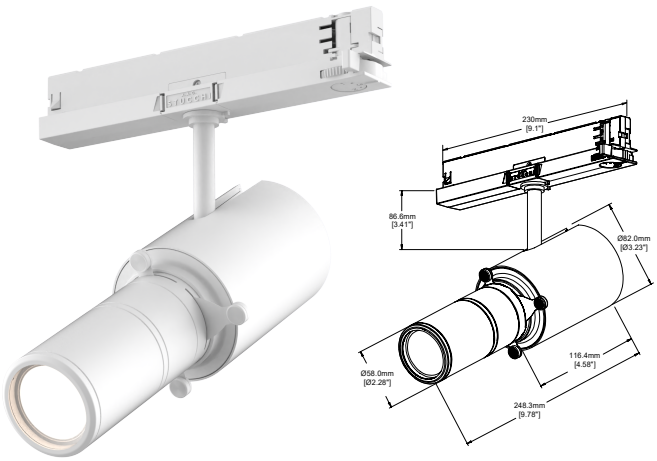

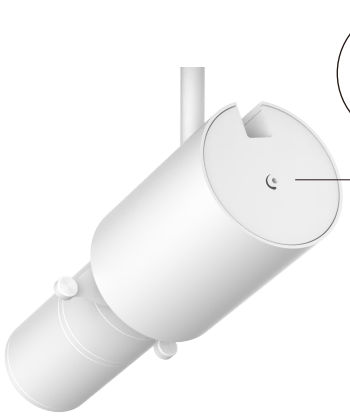

Local Dimming Pot, use Philips head screw driver to control light level (remote dimmer/ device is not accepted)

www.macrongroup.com
2024.06.26 Copyright © Macron.
All technical information in this document is subject to change.

41146 #352, Perng-Yi Road,
Taiping, Taichung, Taiwan R.O.C.
tel +886-4-2270-8357 fax +886-4-2774516

MACRON
Architectural Lighting