



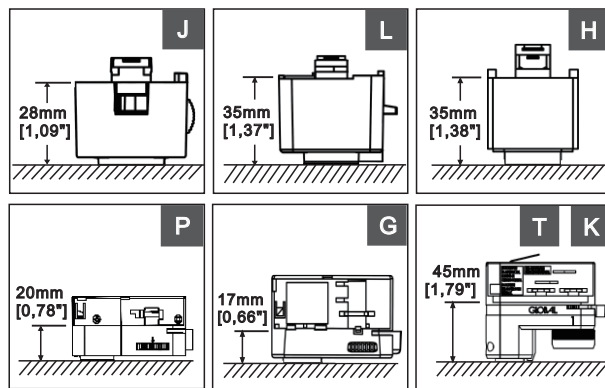

1. Juno is a registered trademark of Juno Lighting
2. Halo is a registered trademark of Cooper Lighting
3. Lightolier is a registered trademark of Philips Lighting

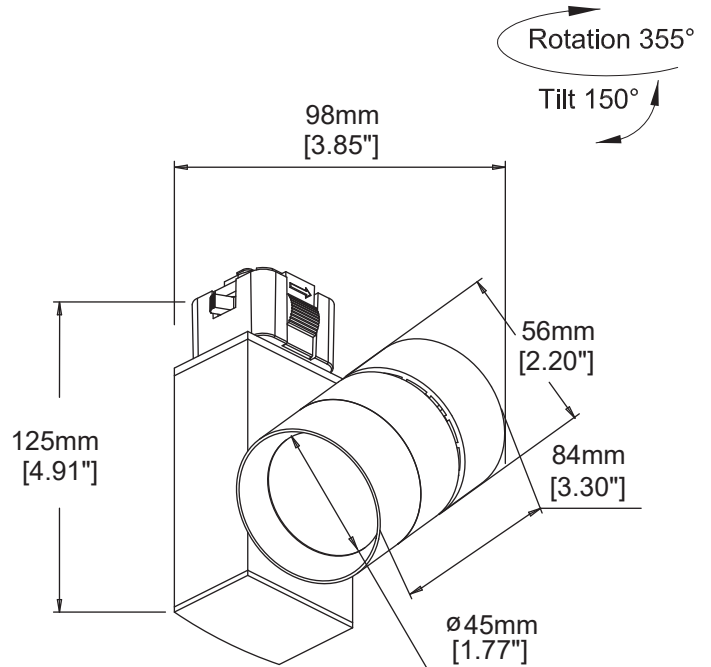

Description

Classic VS3 is a high-performance and versatile LED track spotlight designed for any professional, commercial, and architectural applications. This luminaire delivers up to 1400 lm while consuming just 20 watts. The soft-focus lens and glare-cutoff bezel provides superior visual experiences. Owing to a twist-lock bezel design, the reflectors and accessory chambers are easily accessible in the field. The accessory chamber could hold up to three accessories for the most demanding applications. Integrated class 2 isolated driver is fine-tuned to provide best dimming performance and efficacy for this luminaire. Classic VS3 offers a wide array of options for beam angles, track adapters, and accessories making it suitable for your most demanding projects.

Features

LED	Lumiled Luxeon COB 1203
Color temperature	2700K, 3000K, 3500K, 4000K
Optics	Spot 20° / Medium 24° / Wide 35°
Accessories	Cross baffle / Honey Comb Louver
Driver	Integrated Class 2 driver, Power Factor >0.90

Performance

Delivered output	Up to 1000 lm(90+ CRI) / Up to 1200 lm(80+ CRI)
Power consumption	12 Watt
Color rendering	80+CRI (90 CRI optional)
CBCP	Spot 4200 cd/ Medium 3549 cd/ Wide 2214cd

Electrical and Control

Input voltage	See the ordering code
Control	TRIAC/ELV dimming
	0-10V(Please consult factory)
Feature	Overload & short circuit protection

Construction

Material	Aluminum
Finishes	Black/ White
Lens	Interchangeable optics

Rating/ Certification/ Warranty

- Dry and damp Locations
- RoHS compliant
- UL classified E465197
- 5 years/ 50,000 hrs warranty

Ordering Code Information


PRODUCT	TRACK SYSTEM	LUMEN	COLOR TEMPERATURE	FINISH	BEAM ANGLE	INPUT VOLTAGE
CLS VS2	J	10	27	WH	S	3
CLS VS2	H Halo track compatible J Juno track compatible L Lightolier track compatible G Global-3 circuit, GA69 K Global HTEK HTEK100 P Power Gear- 3 wire, 3 circuit T Global TEK TEK100	10 1000 lm	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K)	WH (White) BK (Black)	S (Spot) / 20 deg. M (Medium) / 24 deg. W (Wide) / 35 deg.	3 (120-277V) 4 (220-240V)

Photometrics

12W | 90CRI | 3000K

Spot 20°

Delivered Output : 964 lm | CBCP : 4200 cd | Beam Angle : 20°

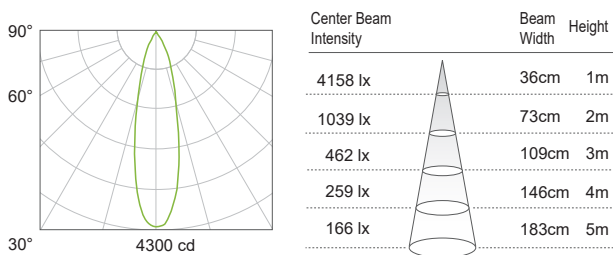


MULTIPLYING FACTORS:
(Multiplying Factor is based on 3000K-90+ CRI IES file on website)

CCT	2700K-80+	3000K-80+	3500K-80+	4000K-80+
Factors	1.16	1.19	1.22	1.26

CCT	2700K-90+	3000K-90+	3500K-90+	4000K-90+
Factors	0.97	1.0	1.05	1.08


Medium 24°

Delivered Output : 982 lm | CBCP : 3549 cd | Beam Angle : 24°

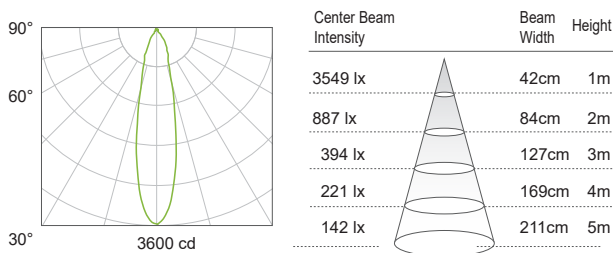


Wide 35°

Delivered Output : 978 lm | CBCP : 2214 cd | Beam Angle : 35°

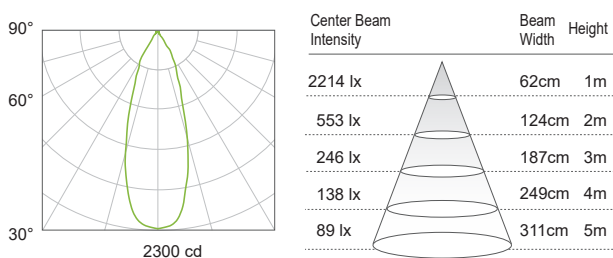

Optional Accessory


Cross Baffle



CLS VS2 Cross Baffle



Honey Comb Louver



CLS VS2 HCL Honey Comb Louver

