



## Specification sheet

REV.2

## Classic VS4 Vertical Wall Wash Maxi (Global / Juno / Halo / Lightolier / Power Gear)



1. Juno is a registered trademark of Juno Lighting
2. Halo is a registered trademark of Cooper Lighting
3. Lightolier is a registered trademark of Philips Lighting

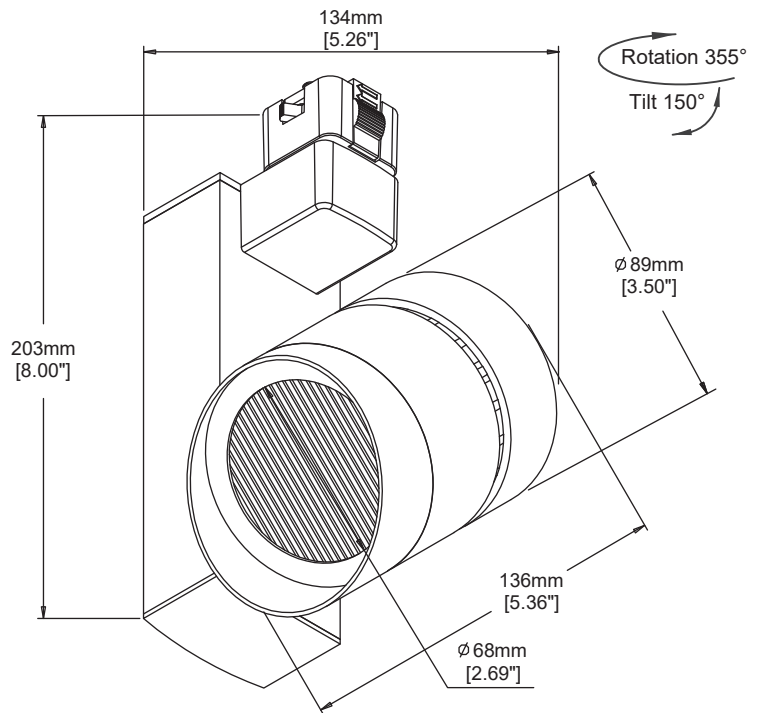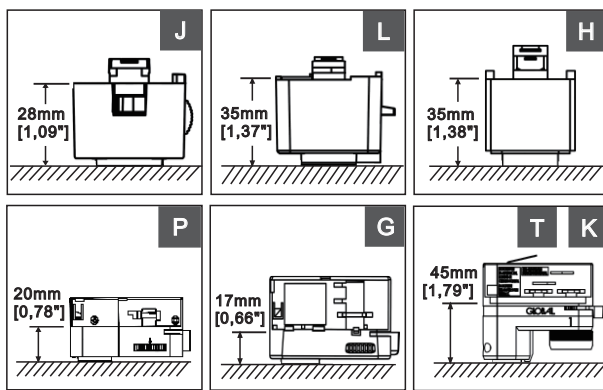

### Description

Classic VW4 is a high-power and versatile track wallwasher designed to deliver evenly distributed linear flood lighting effect by exploiting a linear spread glass lens. The angle-cut bezel directs light toward the direction of the wall while reducing glare. This luminaire can tilt up to 100° for maximum adjustability tailored to meet the needs of individual applications. Integrated class 2 isolated driver is fine-tuned to provide best dimming performance and efficacy for this luminaire.

### Features

|                          |                                               |
|--------------------------|-----------------------------------------------|
| <b>LED</b>               | Lumiled Luxeon COB 1208                       |
| <b>Color temperature</b> | 2700K/ 3000K/ 3500K/ 4000K                    |
| <b>Optics</b>            | Wide 39° and linear spread glass lens         |
| <b>Driver</b>            | Integrated class 2 driver, power factor >0.90 |

### Performance

|                          |                   |
|--------------------------|-------------------|
| <b>Delivered output</b>  | Up to 2242 lm     |
| <b>Power consumption</b> | 36W               |
| <b>Color rendering</b>   | CRI 80+ / CRI 90+ |
| <b>CBCP</b>              | Wide 3851cd       |

### Electrical and Control

|                      |                                     |
|----------------------|-------------------------------------|
| <b>Input voltage</b> | See the ordering code               |
| <b>Control</b>       | TRIAC/ELV dimming                   |
| <b>Feature</b>       | Overload & short circuit protection |

### Construction

|                 |                                         |
|-----------------|-----------------------------------------|
| <b>Material</b> | Die-cast Aluminum                       |
| <b>Finishes</b> | Black/ White                            |
| <b>Lens</b>     | Reflectors and linear spread glass lens |

### Rating/ Certification/ Warranty

- Dry and damp Locations
- RoHS compliant
- UL classified E465197
- 5 years/ 50,000 hrs warranty

## Ordering Code Information


| PRODUCT | TRACK SYSTEM                                                                                                                                                                                                                                        | LUMEN      | COLOR TEMPERATURE                                    | FINISH                                       | BEAM ANGLE         | INPUT VOLTAGE                                            |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------------------------|----------------------------------------------|--------------------|----------------------------------------------------------|
| CLS VW4 | H                                                                                                                                                                                                                                                   | 30         | 27                                                   | WH                                           | S                  | 1                                                        |
| CLS VW4 | <b>H</b> Halo track compatible<br><b>J</b> Juno track compatible<br><b>L</b> Lightolier track compatible<br><b>G</b> Global-3 circuit, GA69<br><b>K</b> Global HTEK HTEK100<br><b>P</b> Power Gear- 3 wire, 3 circuit<br><b>T</b> Global TEK TEK100 | 30 3000 lm | 27 (2700K)<br>30 (3000K)<br>35 (3500K)<br>40 (4000K) | WH ( White)<br>BK ( Black)<br>AL (Aluminium) | W (Wide) / 39 deg. | 1 (120V)<br>2 (120-240V)<br>3 (120-277V)<br>4 (220-240V) |

## Photometrics

36W | 80CRI | 3000K

## Wide 39°

Delivered Ourput : 2241 lm | CBCP : 3851 cd | Bean Angle : 45.2°



| Center Beam Intensity | Beam Width | Height |
|-----------------------|------------|--------|
| 3851 lx               | 83cm       | 1m     |
| 963 lx                | 166cm      | 2m     |
| 428 lx                | 249cm      | 3m     |
| 241 lx                | 332cm      | 4m     |
| 154 lx                | 415cm      | 5m     |