
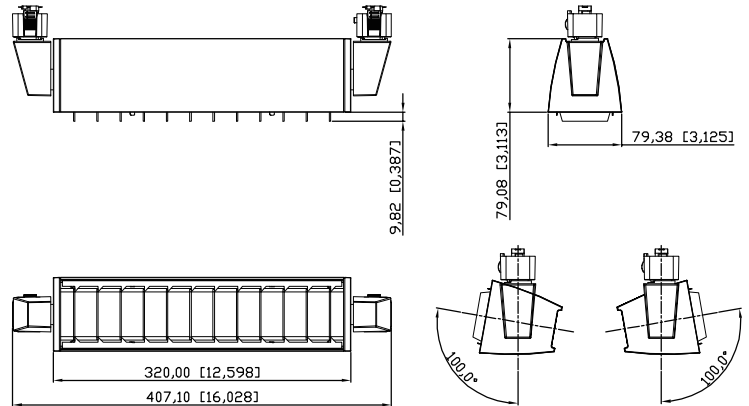
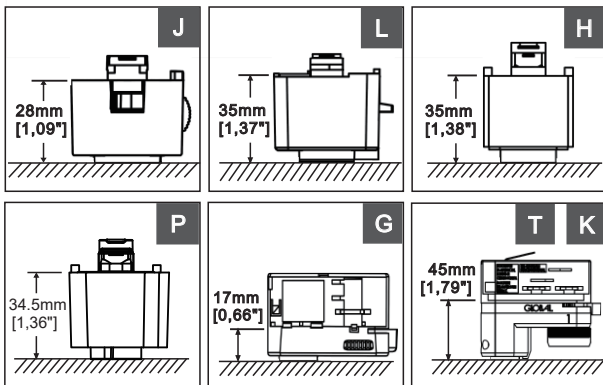


REV.2

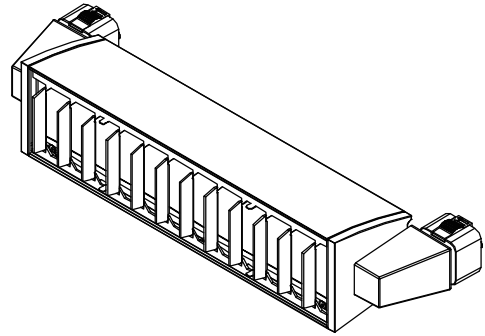

**Description**

Classic Linear Flood is a high performance track wallwasher. It delivers up to 2000 lm/ft and 83 lm/W. It can tilt up to 100° for maximum field adjustability and flexibility. The integrated LED board and drivers can be accessed by removing the front lens module for serviceability. The driver has been fine-tuned to deliver the best dimming performance. It comes with standard one foot or two feet and an option of louver, which is designed with simple field installation.

**Features**

LED	Nichia NF2L757GRT-V1
Color temperature	2700K/ 3000K/ 3500K/ 4000K
Accessories	Louver
Driver	Integrated class 2 driver, power factor >0.90

**Performance**

Delivered output	Up to 2254lm
Power consumption	25 W
Color rendering	80+ CRI (90 CRI optional)
CBCP	742 cd

**Electrical and Control**

Input voltage	See the ordering code
Control	TRIAC/ELV dimming
Feature	Overload & short circuit protection

**Construction**

Material	Machining Grade Aluminium
Finishes	Black/ White
Lens	Proprietary Optics

**Rating/ Certification/ Warranty**

- Dry and damp Locations
- RoHS compliant
- 5 years/ 50,000 hrs warranty

**Ordering Code Information**

PRODUCT	TRACK SYSTEM	LUMEN	COLOR TEMPERATURE	FINISH	INPUTVOLTAGE DIMMING
CLS LF1	J	20	27	WH	3


CLS LF1	H Halo track compatible J Juno track compatible L Lightlier track compatible G Global-3 circuit, Ga69 GK K Global HTEK HTEK100 P Power Gear- 3 wire, 3 circuit T Global TEK, TEK100	20 2000lm	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K)	WH ( White) BK ( Black)	3 (120-277V) / DIM on 120V only 4 (220-240V) 7 (277V)
---------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------	------------------------------------------------------	----------------------------	-------------------------------------------------------------

## Photometrics

25W | 90CRI | 3000K

### Wide 120°

Delivered Output : 2254 lm | CBCP : 742 cd | Beam Angle : 120°

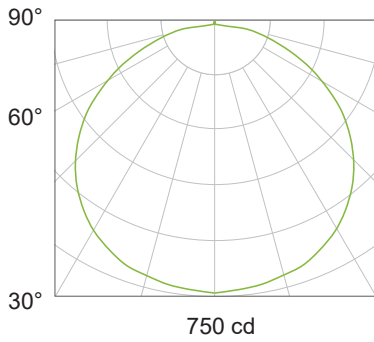

Center Beam Intensity	Beam Width	Height
741 lx	354cm	1m
185 lx	708cm	2m
82 lx	1062cm	3m
46 lx	1415cm	4m
30 lx	1769cm	5m




### Optional Accessory



CLS LF1

Louver



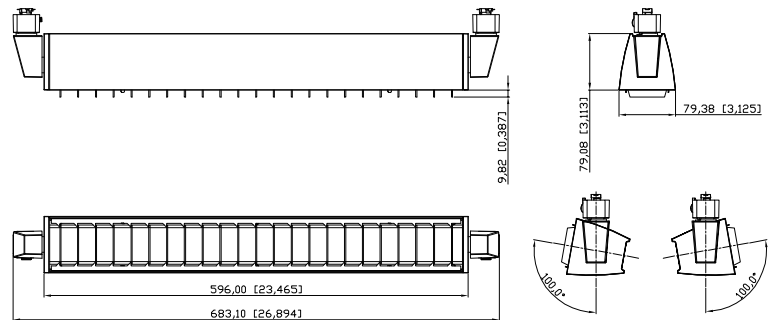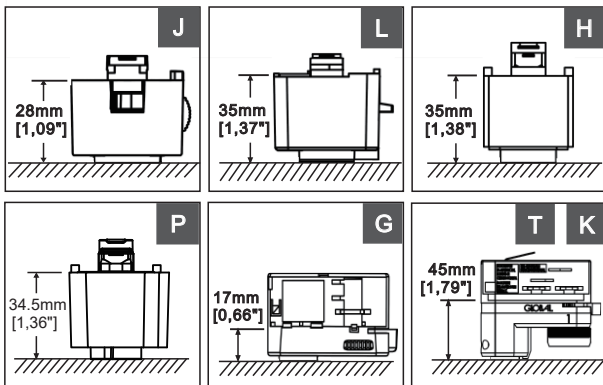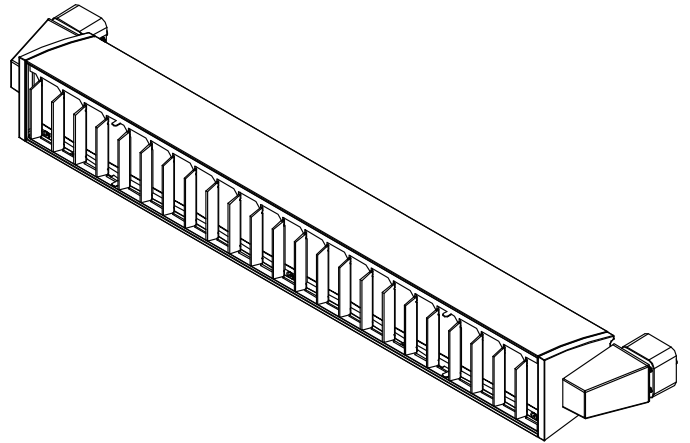

**Description**

Classic Linear Flood is a high performance track wallwasher. It delivers up to 2000 lm/ft and 83 lm/W. It can tilt up to 100° for maximum field adjustability and flexibility. The integrated LED board and drivers can be accessed by removing the front lens module for serviceability. The driver has been fine-tuned to deliver the best dimming performance. It comes with standard one foot or two feet and an option of louver, which is designed with simple field installation.

**Features**

LED	Nichia NF2L757GRT-V1
Color temperature	2700K/ 3000K/ 3500K/ 4000K
Accessories	Louver
Driver	Integrated class 2 driver, power factor >0.90

**Performance**

Delivered output	Up to 4430 lm
Power consumption	49 W
Color rendering	80+CRI (90 CRI optional)
CBCP	1452 cd

**Ordering Code Information**

PRODUCT	TRACK SYSTEM	LUMEN	COLOR TEMPERATURE	FINISH	INPUTVOLTAGE DIMMING
CLS LF2	J	40	27	WH	3

CLS LF2	H Halo track compatible J Juno track compatible L Lightlier track compatible G Global-3 circuit, Ga69 GK K Global HTEK HTEK100 P Power Gear- 3 wire, 3 circuit T Global TEK, TEK100	40 4000lm	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K)	WH ( White) BK ( Black)	3 (120-277V) / DIM on 120V only 4 (220-240V) 7 (277V)
---------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------	------------------------------------------------------	----------------------------	-------------------------------------------------------------

**Electrical and Control**

Input voltage	See the ordering code
Control	TRIAC/ELV dimming
Feature	Overload & short circuit protection

**Construction**

Material	Machining Grade Aluminium
Finishes	Black/ White
Lens	Proprietary Optics

**Rating/ Certification/ Warranty**


- Dry and damp Locations
- RoHS compliant
- 5 years/ 50,000 hrs warranty

# Photometrics


49W | 90CRI | 3000K

## Wide 120°

Delivered Ourput : 4430 lm | CBCP : 1452 cd | Bean Angle : 120°

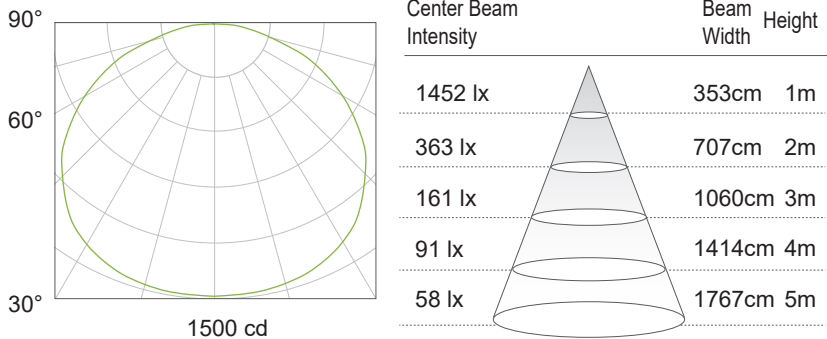

## Optional Accessory



CLS LF2

Louver

