



Macron Associate co.  
www.macrongroup.com  
Email:macron@macrongroup.com  
Tel:+886 4 22708357 Fax:+886 4 22774516  
Address:No.352, Peng-Yi Road, Taiping, Taichung, 41146, TAIWAN R.O.C

---

## Macron

---

Client:

LumCAT: MCB-LTE55-FDRSNC-BV-WH3090M00-20181127

Luminaire:

Report No:

Voltage(V):

Test No:

Current(A):

LampCAT:

Power (W): 7.9710

Lamp flux(lm): 477.6

PF:

Number of Lamps: 1

Ballast type:

Length(mm): 0

Width(mm): 0

Phm Type: C

Height(mm): 0

---

## Photometric Results

---

Lumens(lm): 477.59

Efficiency(%): 100.00%

Lumens(lm)/Power(W): 59.92

Central intensity(cd): 1098.128

Maximum intensity(cd): 1123.787

Angle of maximum intensity: C=30.0  $\gamma$ =0.0

Beam Angle(50%Imax): [C0/180]Total=35.2

[C90/270]Total=31.2

Field angle(10%Imax): [C0/180]Total=61.0

[C90/270]Total=57.6

Maximum s/h(1/2): C0\_180=0.57 C90\_270=0.51

Maximum s/h(1/4): C0\_180=0.60 C90\_270=0.56

Up flux rate of lamp(%): 0.00%


Down flux rate of lamp(%): 100.00%


Up flux rate of LUM(%): - -

Down flux rate of LUM(%): 100.00%

CIE Type : Direct lighting

Output flux ratio in  $\pi$  solid angle : 94.447%

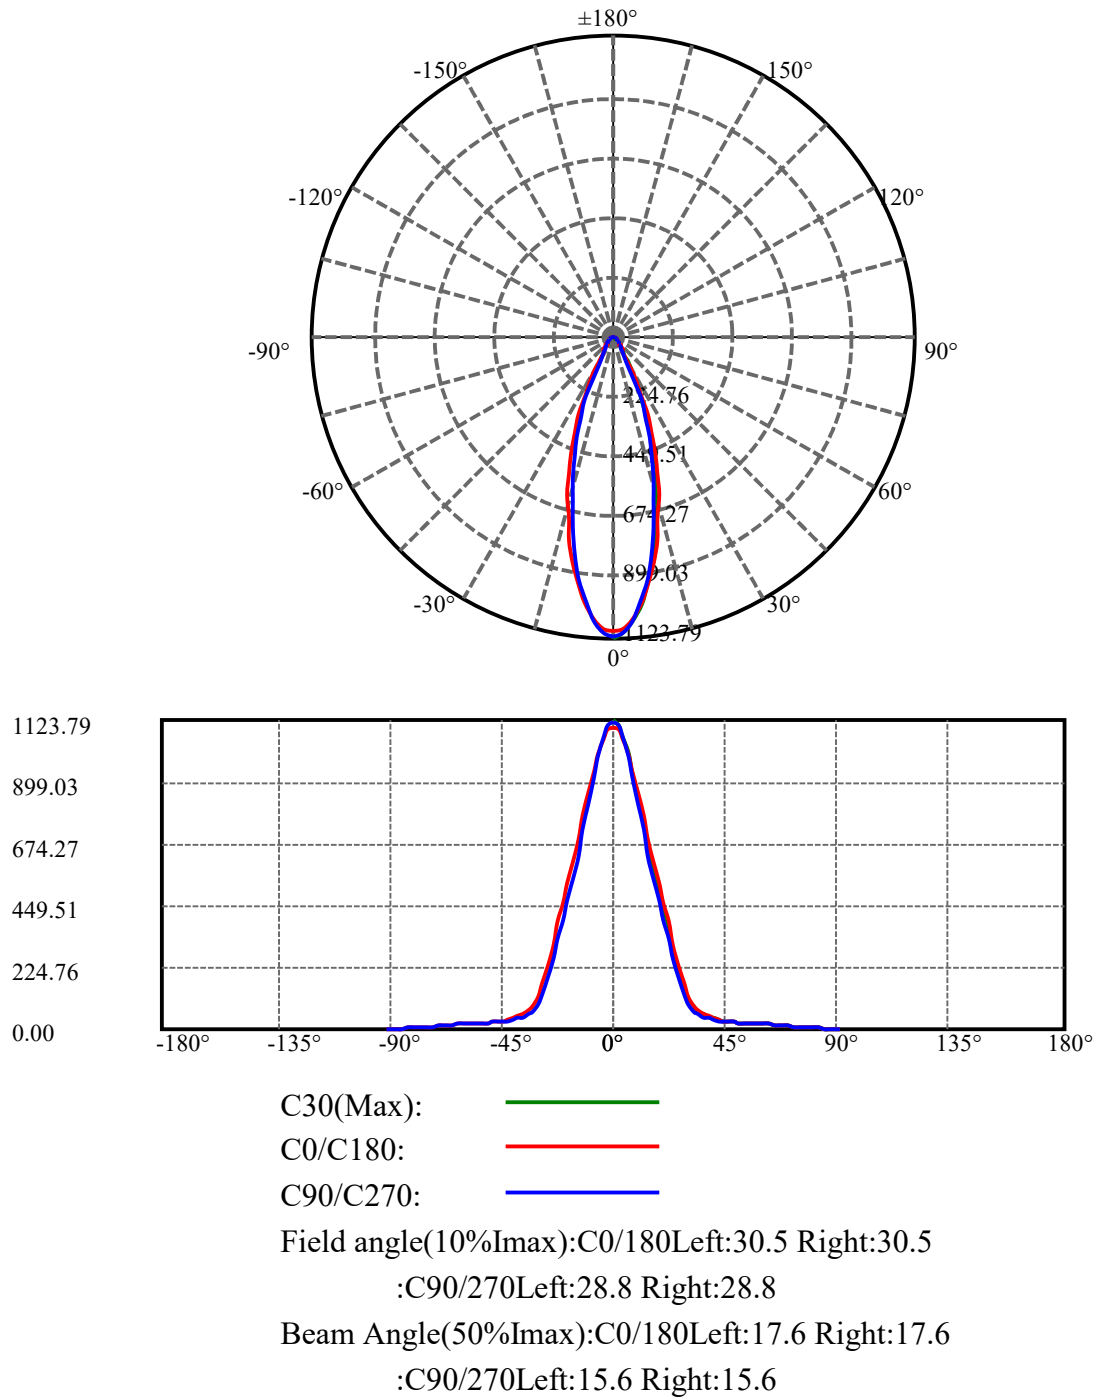

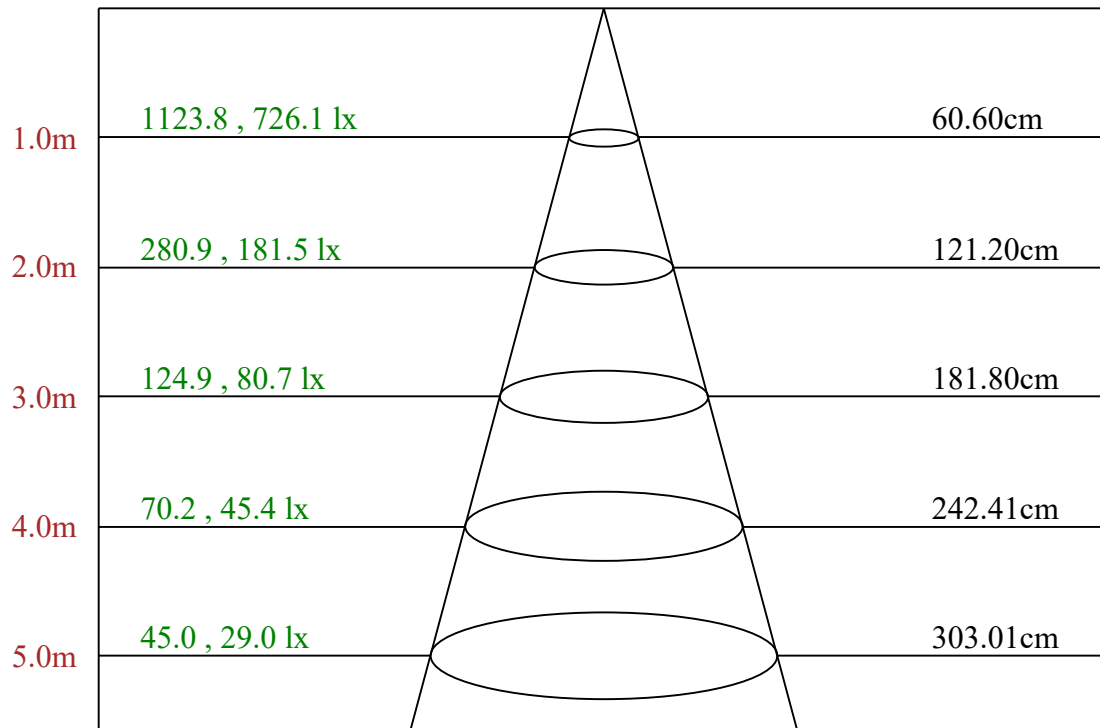

Max , Ave      Beam angle of C30 plane 33.71