
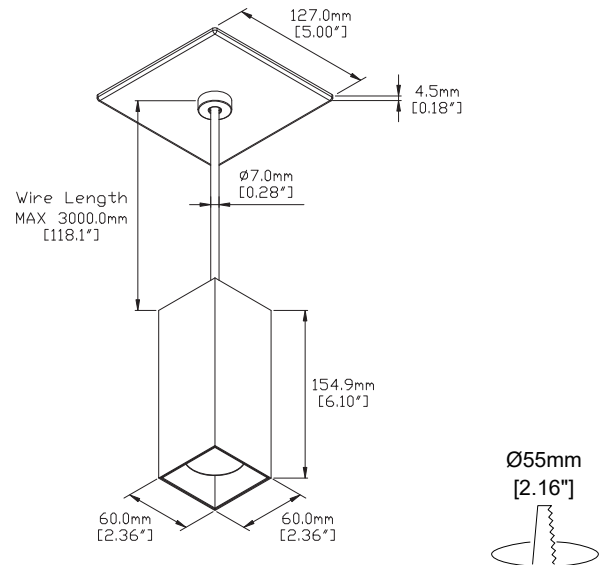


Specification sheet

REV.1

QUB 55 CP SG 20 Pendant Cylinder, length 200mm

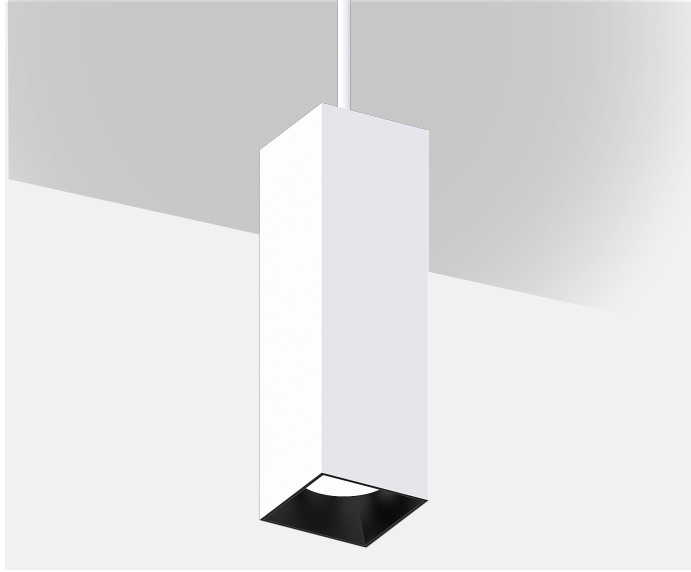

Description

QUB pendant is a square cylinder lighting performance instrument. Its fine line and sharp aesthetics provides modern and clean aesthetics into architecture. QUB comes in surface and pendant mount and two different apertures: 60mm and 90mm with lumen output ranging from 800lm to 2200lm. QUB 55 CP SG 20 features up-and-down illumination that provides both direct and indirect lighting functionality, built-in driver with 3-in-1 dimming technology, and four beam options for downlighting to accommodate all possible applications.

Features

LED	Lumiled Luxeon COB1205
Color temperature	2700K/ 3000K/ 3500K/ 4000K
Optics	Spot 21° / Medium 30° / Wide 40° UP Flood 102°
Driver	Integrated class 2 driver, power factor >0.90 Tri-dimmable, TRIAC/ELV/0-10V

Performance

Delivered output	Down 1209 lm / Up 344lm (90°CRI)
Power consumption	34 W
Color rendering	90°CRI
CBCP	Spot 5210cd / Medium 3209cd / Wide 2228 cd / UP Flood 133 cd L80, B10 50,000 hrs

Lumen maintenance

Ordering Code Information

PRODUCT	SHAPE	MODE	LENGTH	COLOR TEMPERATURE	FINISH	BEAM ANGLE	COLOR RENDERING	INPUT / DIMMING
QUB 55 CP	S	G	20	30	WHBK	S	9	3AE
QUB 55CP, Cylinder Cable Pendant	S (Square)	D (Direct) G (Glow)	20 (200 mm)	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K)	WHBK (White/Black) BKGD (Black/Gold) BKBK (Black/Black)	S (Spot / 20 deg.) M (Medium / 25 deg.) W (Wide / 34 deg.) F (Flood / 55 deg.) G (Up Flood / 112 deg.)	9 (90 CRI+)	3AE (120-277V / 0-10V Dimming & 120V TRIAC / ELV)

Electrical and Control

Input voltage	120V-277V
Control	TRIAC/ELV/0-10V Dimming
Feature	Overload & short circuit protection

Construction

Material	Casting & Extrusion grade Aluminum Alloy
Finishes	Black body with gold trim/ Black body with black trim/ White body with black trim
Optics	Field Interchangeable optics

Rating/ Certification/ Warranty

- Dry and damp Locations
- RoHS compliant
- 5 years/ 50,000 hrs warranty


Photometrics

34W | 90CRI | 3000K | White body with Black trim

CCT	2700K-90+	3000K-90+	3500K-90+	4000K-90+
Factors	0.96	1.0	1.04	1.08


Down Spot 21°

Delivered Ourput : 1209 lm | CBCP : 5210cd | Beam Angle : 21°

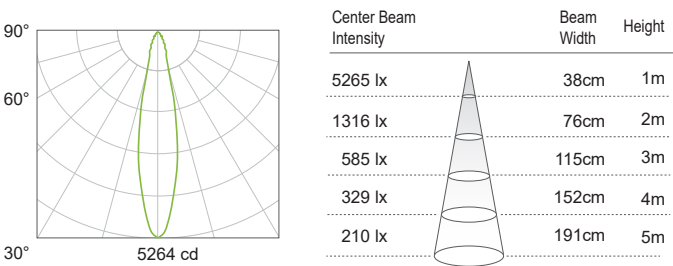


Down Medium 30°

Delivered Ourput : 1138 lm | CBCP : 3209 cd | Beam Angle : 30°

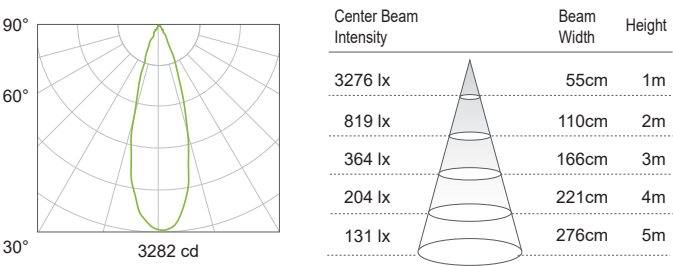


Down Wide 40°

Delivered Ourput : 1107 lm | CBCP : 2228cd | Beam Angle : 40°

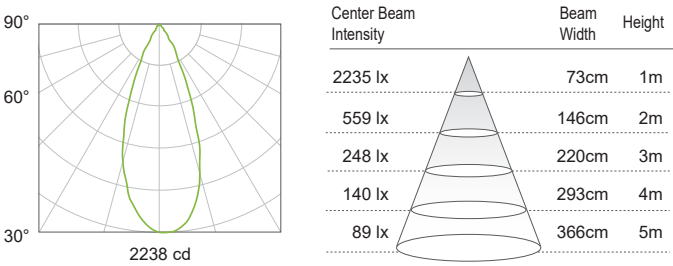

Up Flood 102°

Delivered Ourput : 344 lm | CBCP : 133 cd | Beam Angle : 102°

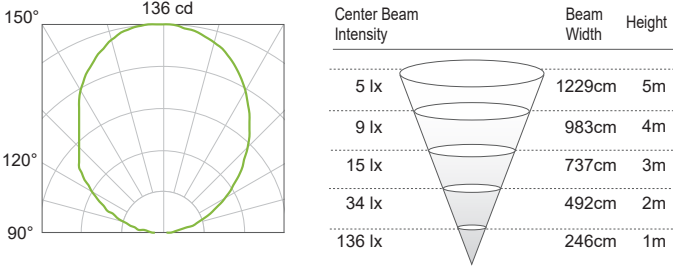

Optional Accessory

Product	ACC.	
VAL 55	HCL	
VAL 55	HCL Honey Comb Louver	