


Specification sheet

REV.1

Slimliter Wall Sconce



shown using 1ft light tube

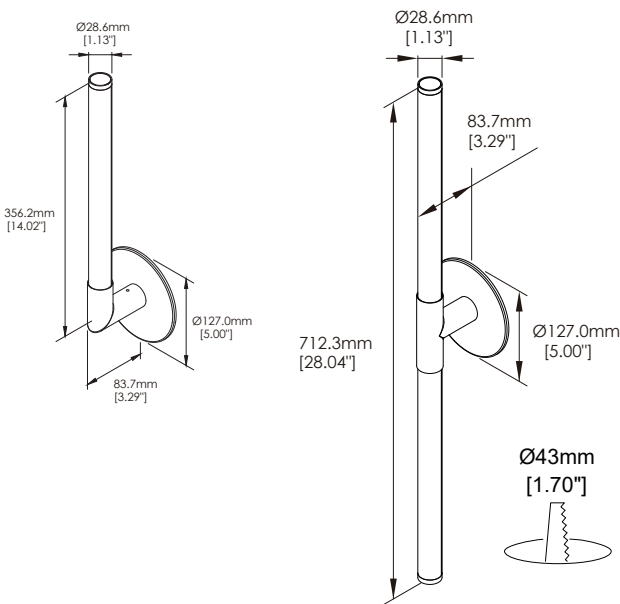

Dimensions-see next page for more details

Description

- **Slim profile, modular design, solid construction**
 - Delivers up to 400 lm/ft and 6 watt/ft
- **Continuous 360° tube rotation**
 - Unique mechanical design. Without potential hazard. Tight rotation for directional aiming.
- **Exceptional light distribution and efficacy**
 - Custom-designed optics that hide light sources without compromising efficacy.
- **Vertical or Horizontal mount**
- **Many Speciality Finish Options**

Features

LED	LM80 rated LED Tape
Color temperature	2700K/ 3000K/ 3500K/ 4000K/ Warm Dim
Optics	Flood

Performance (Light Tube)

Delivered output	Up to 400 lm / ft.
Power consumption	Up to 6 W / ft.
Color rendering	90+CRI

Electrical and Control

Input voltage	See the ordering code
Control	Standard 0-10V dimming or ELV dimming (Ordered separately)
Feature	Overload & short circuit protection

Construction

Material	Machining grade Aluminum
Finishes	White / Black / Brushed Pewter Brushed Copper / Satin Nickel
Lens	Diffusive

Rating/ Certification/ Warranty

- Dry Locations
- RoHS compliant
- 5 years/ 50,000 hrs warranty


Approval / Certificate

- ETL in process


Ordering Code Information

PRODUCT	CONFIGURATION	TUBE LENGTH	TUBE LUMEN	COLOR TEMPERATURE	FINISH	INPUT VOLTAGE/ Dimming
SLWC	V1	12	ST	27	WH	3AE
Slimliter Wall Sconce	V1 (Vertical Sconce 1 direction) V2 (Vertical or Horizontal Sconce 2 direction)	12 (12")-1ft 18 (18")-1.5ft 24 (24")-2ft	ST Standard (400 lm/FT)	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K) WD (Warm Dim)/ 1800-3000K	WH (White) BK (Black) BP (Brushed Pewter) BC (Brushed Copper) SN (Satin Nickel)	3AE (120-277V input, 0-10V/ TRIAC/ELV dimmable) 3E (120-277V input, TRIAC/ELV Dimming on 120V)


Finishes




White




Black



Copper




Pewter



Satin Nickel

Dimensions

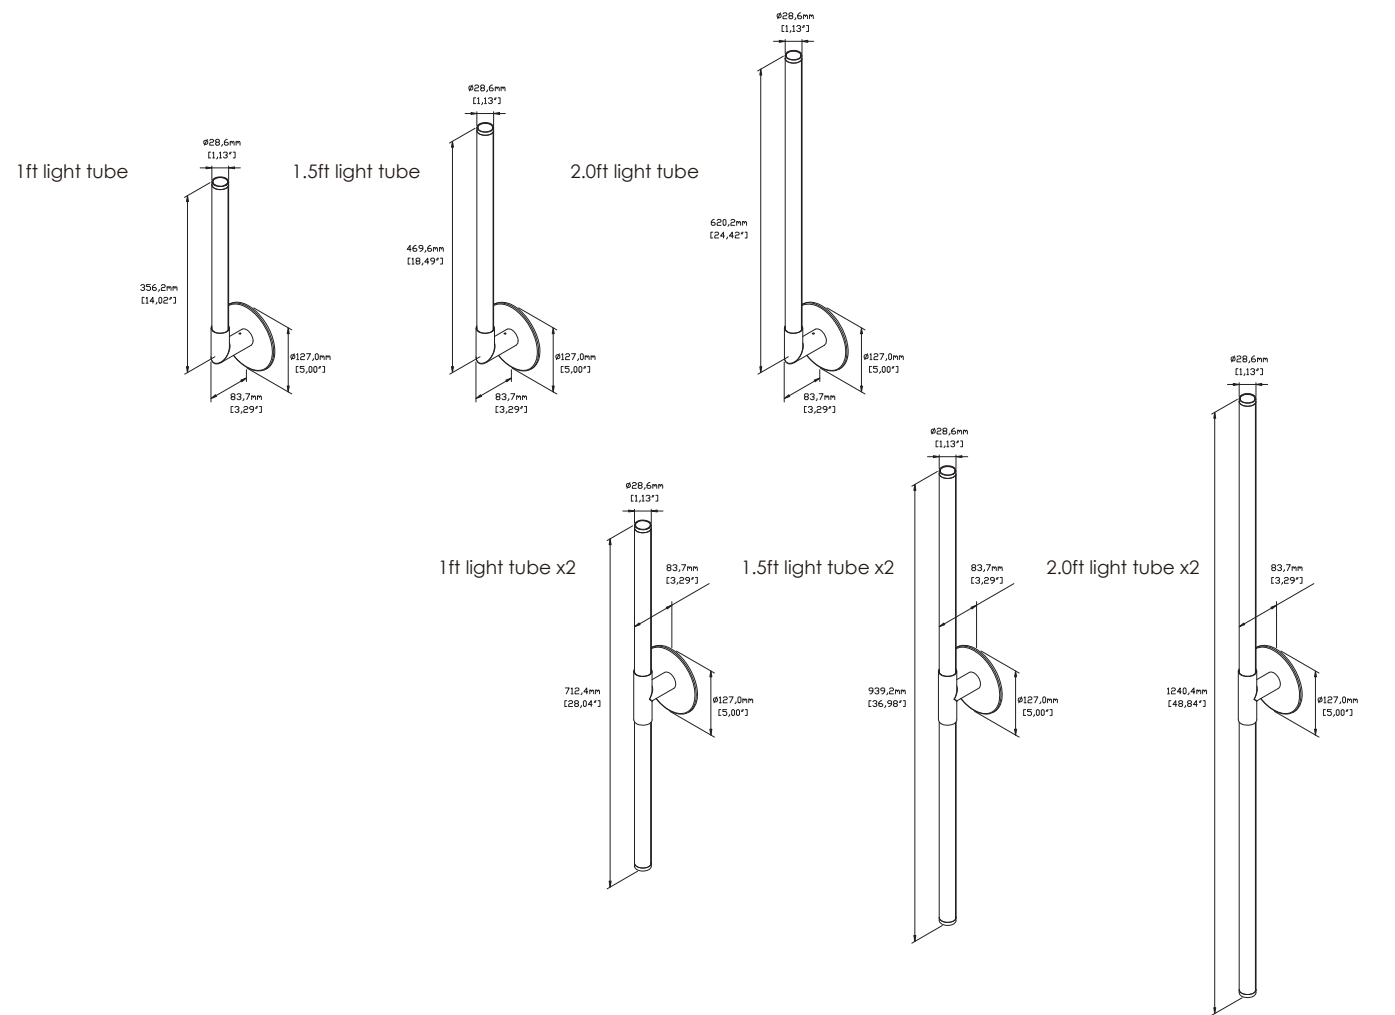


Photometrics / 1ft 3000K light tube

6W | 90CRI | 3000K

Slimliter 1ft (Standard)

Delivered Ourput : 364 lm | CBCP : 111 cd | Beam Angle : 113°

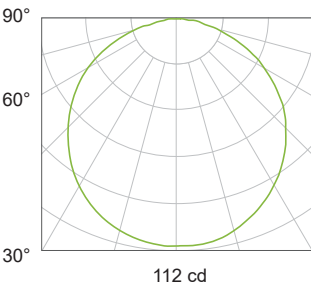

Center Beam Intensity	Beam Width	Height
112 lx	409cm	1m
28 lx	818cm	2m
13 lx	1227cm	3m
7 lx	1635cm	4m
5 lx	2044cm	5m