


Specification sheet

REV.1

VAL 55 CP D/G 20
2" Cylinder Pendant 200mm Length

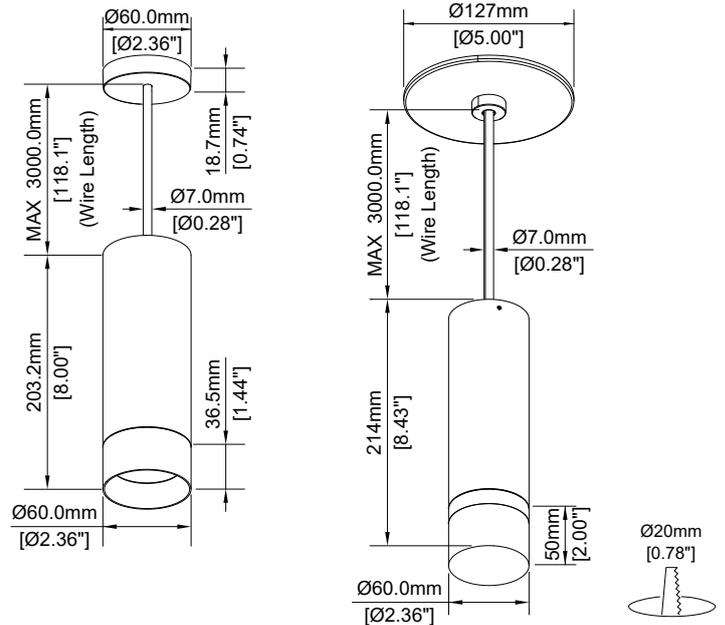

Description

VAL pendant is a performance instrument to bring slim aesthetics into architectural aspiration. VAL CPRD 20 features built-in drivers with 3-in-1 dimming technology, twist-lock installation mechanism, best-in-class light quality, aesthetic proportions and many more.

Features

LED	Lumiled Luxeon COB1203
Color temperature	2700K/ 3000K/ 3500K/ 4000K / Warm Dim
Optics	Spot 22° / Medium 30° / Wide 40° / Flood 56°
Driver	Integrated class 2 driver, power factor >0.90 Output current 500mA

Performance

Delivered output	Up to 1413 lm (Down) / Up to 350 lm (Up)
Power consumption	22 W
Color rendering	90+ CRI
CBCP	Spot 5210 cd / Medium 3209 cd / Wide 2227 cd / Flood 1681 cd / Up 133 cd
Lumen maintenance	L80 B10 50,000 hrs

Ordering Code Information

PRODUCT	MODE	LENGTH	COLOR TEMPERATURE	FINISH OF BODY	BEAM ANGLE	COLOR RENDERING	INPUT / DIMMING	BEZEL STYLE
VAL 55 CP	D	20	27	WH	S	9	3AE	STWH
VAL 55 CP, Cylinder Cable Pendant	D (Direct) G (Glow)	20 (200 mm)	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K) WD (Warm Dim) 1800-3000K	WH (White) BK (Black) BP (Brushed Pewter) BC (Brushed Copper) SN (Satin Nickel)	S (Spot / 22 deg.) M (Medium / 30 deg.) W (Wide / 40 deg.) F (Flood / 56 deg.)	9 (90 CRI+)	3AE (120-277V, TRIAC/ELV/0-10V Dimming)	ST WH WHB BK BKG DA Clear Acrylic WW Wall Wash

Electrical and Control

Input voltage	See the ordering code
Control	TRIAC/ELV/0-10V Dimming, 50/60Hz (TRIAC/ELV Dimming ON 120V ONLY)
Feature	Overload & short circuit protection

Construction

Material	Casting & Extrusion grade Aluminum Alloy
Finishes	Black / White
Optics	Field Interchangeable optics

Rating/ Certification/ Warranty

- Dry and damp Locations
- RoHS compliant
- 5 years/ 50,000 hrs warranty

Specification sheet

REV.1

VAL 55 CP D/G 20
2" Cylinder Pendant 200mm Length


Photometrics

22W | 90CRI | 3000K | White body with Black trim

CCT	2700K-90+	3000K-90+	3500K-90+	4000K-90+
Factors	0.97	1.0	1.04	1.04


Down Spot 22°

Delivered Output : 1208 lm | CBCP : 5210 cd | Beam Angle : 22°

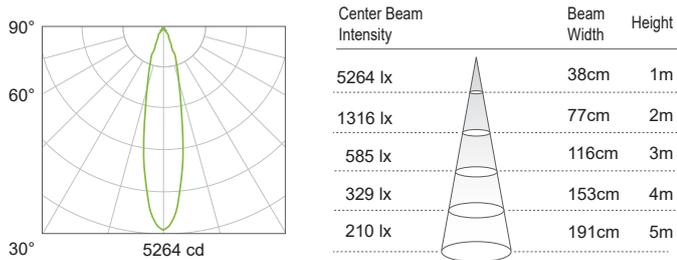


Down Medium 30°

Delivered Output : 1137 lm | CBCP : 3209 cd | Beam Angle : 30°

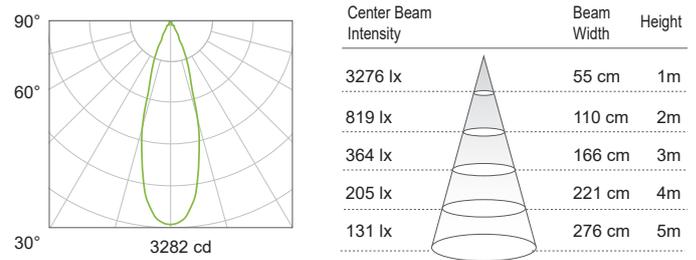


Down Wide 40°

Delivered Output : 1106 lm | CBCP : 2227 cd | Beam Angle : 40°

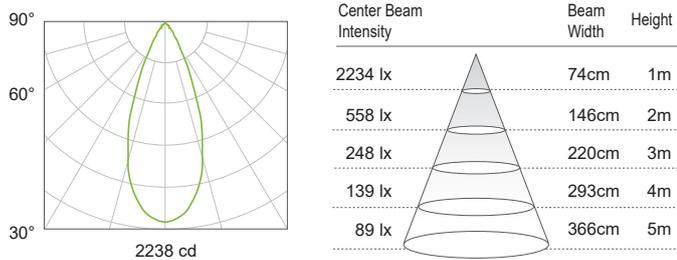


Down Flood 56°

Delivered Output : 1413 lm | CBCP : 1681 cd | Beam Angle : 56°

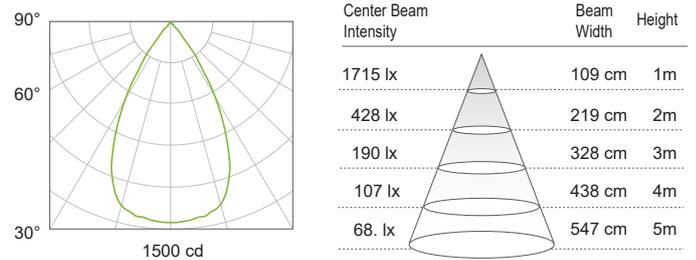

Up Flood 102°

Delivered Output : 345 lm | CBCP : 133 cd | Beam Angle : 102°

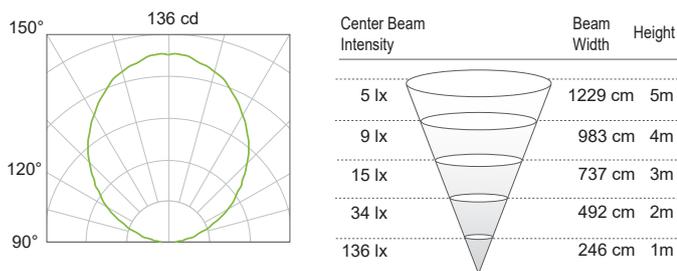

Optional Accessory

