


Specification sheet

REV.1

VAL 55 CS D 15
Cylinder Stem Mount, length 150mm

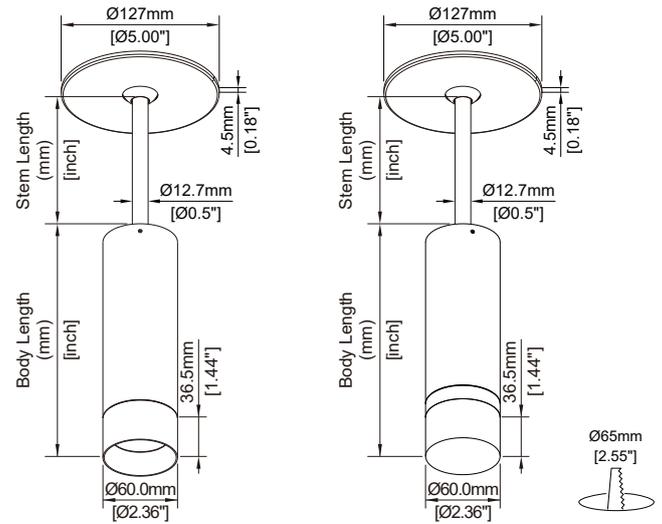

Description

VAL features built-in drivers with 3-in-1 dimming technology, twist-lock installation mechanism, best-in-class light quality, aesthetic proportions and many more. VAL is designed to integrate with architectural space with clean and distinct outline that complement architectural aspiration.

Features

LED	Lumiled Luxeon COB1203
Color temperature	2700K/ 3000K/ 3500K/ 4000K / WD(1800-3000K)
Optics	Spot 22° / Medium 30° / Wide 40° / Flood 56°
Driver	Integrated class 2 driver, power factor >0.90 Output current 250mA

Performance

Delivered output	Up to 800 lm
Power consumption	10.5 W
Color rendering	90+ CRI
CBCP	Spot 2965 cd / Medium 2031 cd / Wide 1393 cd / Flood 906 cd
Lumen maintenance	L80 B10 50,000 Hours

Ordering Code Information

PRODUCT	MODE	LENGTH	STEM LENGTH	COLOR TEMPERATURE	FINISH OF BODY	BEAM ANGLE	COLOR RENDERING	INPUT / DIMMING	BEZEL STYLE
VAL 55 CS	D	15	12	27	WH	S	9	3E	STWH
VAL 55 Cylinder, Stem Mount	D (Direct)	15 (150 mm)	12" 24" 48"	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K) WD (Warm Dim 1800-3000K)	WH (White) BK (Black) BP (Brushed Pewter) BC (Brushed Copper) SN (Satin Nickel)	S (Spot / 22 deg.) M (Medium / 30 deg.) W (Wide / 40 deg.) F (Flood / 56 deg.)	9 (90 CRI+)	3E (120-277V, TRIAC/ELV/0-10V Dimming)	ST WHB BK BKG DA Clear Acrylic WW Wall Wash

Electrical and Control

Input voltage	See the ordering code
Control	TRIAC/ ELV Dimming ON 120V ONLY
Feature	Overload & short circuit protection

Construction

Material	Casting & Extrusion grade Aluminum Alloy
Finishes	WH / BK / BP / BC / SN
Optics	Field Interchangeable optics

Rating/ Certification/ Warranty

- Dry and damp Locations
- RoHS compliant
- 5 years/ 50,000 hrs warranty

Specification sheet

REV.1

VAL 55 CS D 15
Cylinder Stem Mount, length 150mm


Photometrics

10.5 W | 90CRI | 3000K | White body with Black trim

CCT	2700K-90+	3000K-90+	3500K-90+	4000K-90+
Factors	0.97	1.0	1.04	1.04


Spot 22°

Delivered Ourput : 697 lm | CBCP : 2965 cd | Beam Angle : 22°

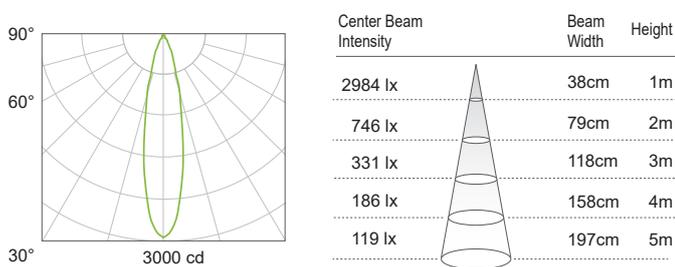


Medium 30°

Delivered Ourput : 675 lm | CBCP : 2031 cd | Beam Angle : 30°

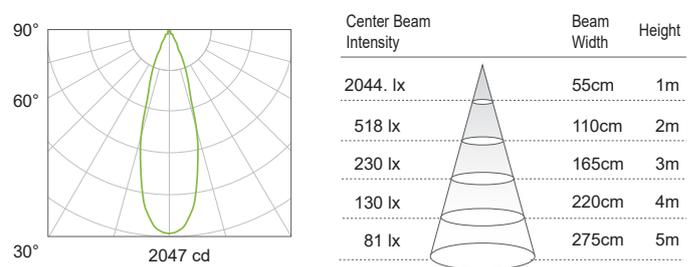


Wide 40°

Delivered Ourput : 690 lm | CBCP : 1393 cd | Beam Angle : 40°

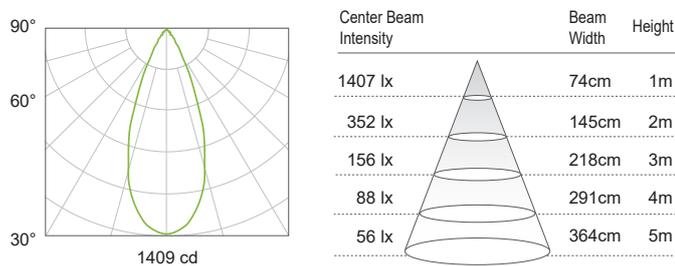

Flood 56°

Delivered Ourput : 809 lm | CBCP : 906 cd | Beam Angle : 56°

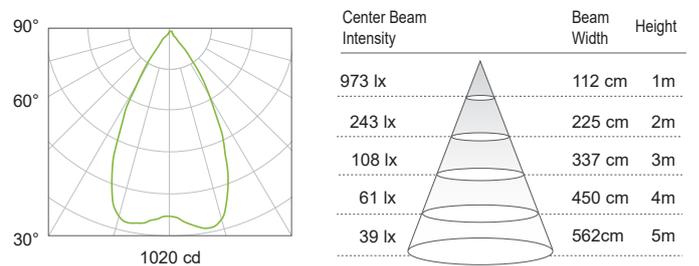

Optional Accessory

Canopy size


5-2 PL

5-2 PL
5"-2" conversion canopy kit

FINISH

WH

WH White
BK Black



ACC.

CL

CL Clear Lens



ACC.

HCL

HCL
Honey Comb Louver



BEZEL STYLE

DA

DA Clear Acrylic



BEZEL STYLE

WW

WW Wall Wash

