


Specification sheet

REV.2

VAL 55 CY SSR15

Surface Cylinder, spot, length 150mm

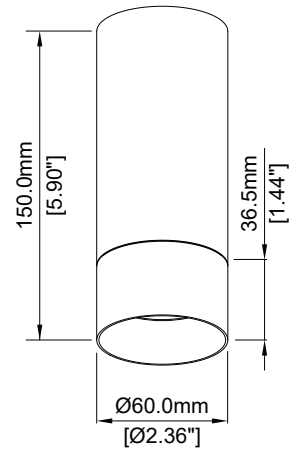

Description

VAL SS features remote drivers with 3-in-1 dimming technology, twist-lock installation mechanism, best-in-class light quality, aesthetic proportions and many more. VAL is designed to integrate with architectural space with clean and distinct outline that complement architectural aspiration.

Features

LED	Lumiled Luxeon COB1203
Color temperature	2700K/ 3000K/ 3500K/ 4000K
Optics	Spot 22° / Medium 30° / Wide 40° / Flood 56°
Driver	Integrated class 2 driver, power factor >0.90

Performance

Delivered output	Up to 1150 lm(90+ CRI) / Up to 1300 lm(80+ CRI)
Power consumption	16 W
Color rendering	90+ CRI (80 CRI+ optional)
CBCP	Spot 4432 cd / Medium 2979 cd / Wide 2037 cd / Flood 1451 cd
Lumen maintenance	L80 B10 50,000 Hours

Ordering Code Information

PRODUCT	MOUNTING TYPE	SHAPE	LRNGTH	COLOR TEMPERATURE	FINISH	BEAM ANGLE	COLOR RENDERING
VAL 55 CY	SS	R	15	27	WHBK	S	9
VAL 55 CY, Cylinder Surface Mount	Surface spot	R (Round)	15 (150 mm)	27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K)	WHBK (White/Black) BKGD (Black/Gold) BKBK (Black/Black)	S (Spot / 22 deg.) M (Medium / 30 deg.) W (Wide / 40 deg.) F (Flood / 56 deg.)	8 (80 CRI+) 9 (90 CRI+)

Electrical and Control

Input voltage	See the ordering code
Control	TRIAC/ELV/0-10V Dimming
Feature	Overload & short circuit protection

Construction

Material	Casting & Extrusion grade Aluminum Alloy
Finishes	Black body with gold trim/ Black body with black trim/ White body with black trim
Optics	Field Interchangeable optics

Rating/ Certification/ Warranty

- Dry and damp Locations
- RoHS compliant
- 5 years/ 50,000 hrs warranty

Specification sheet

REV.2

VAL 55 CY SSR15
Surface Cylinder, spot, length 150mm

Recommend LED Driver:

Note

Driver No.	Input Voltage	Dimming
DAE-1-400-15	120-277V	TRIAC/ELV/0-10V

Photometrics

16W | 90CRI | 3000K | White body with Black trim


MULTIPLYING FACTORS: (Multiplying Factor is based on 3000K-90+CRI IES file on website)

CCT	2700K-80+	3000K-80+	3500K-80+	4000K-80+
Factors	1.12	1.15	1.17	1.22

CCT	2700K-90+	3000K-90+	3500K-90+	4000K-90+
Factors	0.97	1.0	1.04	1.04


Spot 22°

Delivered Ourput : 1085 lm | CBCP : 4432 cd | Beam Angle : 22°

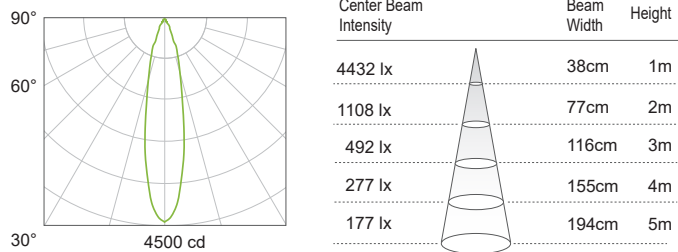


Medium 30°

Delivered Ourput : 1002 lm | CBCP : 2979 cd | Beam Angle : 30°

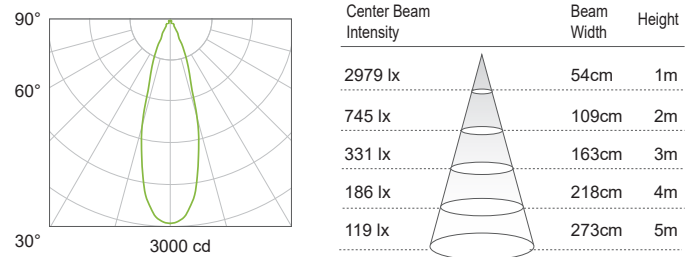


Wide 40°

Delivered Ourput : 1076 lm | CBCP : 2037 cd | Beam Angle : 40°

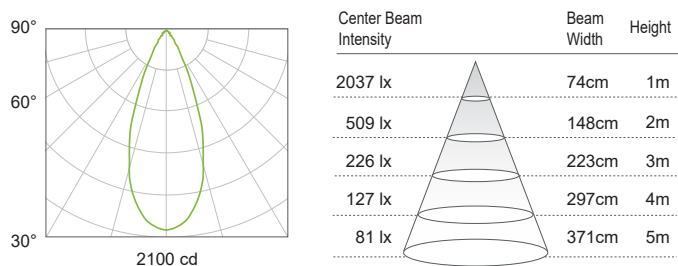


Flood 56°

Delivered Ourput : 1140 lm | CBCP : 1451 cd | Beam Angle : 56°

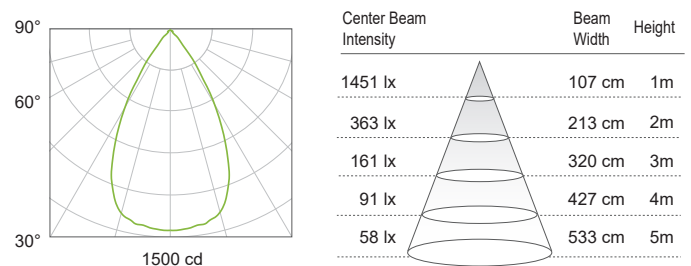

Optional Accessory

Product	Canopy size	FINISH
VAL 55 CY	5-2 PL	WH
VAL 55 CY, Cylinder Surface Mount	5-2 PL 5"-2" conversion canopy kit	WH White BK Black



Product	ACC.
VAL 55	CL
VAL 55	CL Clear Lens



Product	ACC.
VAL 55	HCL
VAL 55	HCL Honey Comb Louver

