


SPECIFICATIONS

Features


- Compact Size & Competitive Cost
- Constant Current Output
- Dual ELV/TRIAC Dimmable(120V ONLY)
- Active Power Factor
- >80% Efficiency Full Load
- Class 2 compliance
- 5 Year Warranty

Wiring Diagram

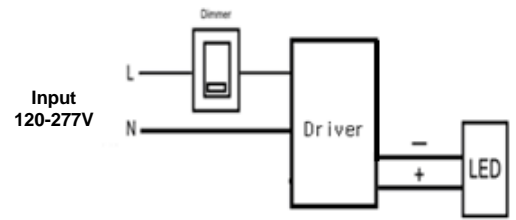

Mechanical and Thermal

Dimension L 1.358" × W 2.776" × H 0.984"
 Lead Wire Length 6" Standard
 Max. Case Operation Temp. 80°C

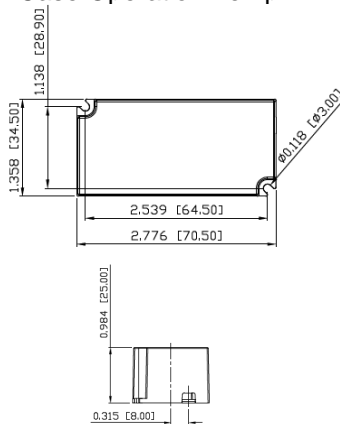

* Dimension in Inch/Metric

Electrical

Maximum Load	4W
Minimum Load	3W
Input Voltage	120-277V
Max Output Voltage/Current	23VDC/175mA
Power Factor	>0.90 typ. (Full load)
Max. Harmonic Distortion	<20%
Efficiency	70% typ.
No Load Loss	<1 W

Protection

- Overload protection
- Thermal protection
- Class 2

Environmental Specifications

- MTBF >100,000 hrs
- RoHS Compliant
- Lead Free SMT process
- Power Factor Correction / Low Load
- FCC Class 2 Certified



Note –

1. UL file No.: E327637



Macron Associate Co. – Power Supply Team

NO.352, Peng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com

E1115

1. Input – specification

	Units	Minimum	Typical	Maximum	Notes
Input Voltage Range(Vin)	Vac	108	120-277	304	
Input Frequency Range	Hz	50	60	63	
Input Power	W		5.5		
Power Factor(PF)		0.8	0.9		Nominal LED voltage, >80% LOAD
Input Current	A	-	-	0.05A@120VAC 0.02A@277VAC	
Inrush Current	A			4 A peak	According to IEC 60555
Total Harmonics Distortion (THD)				< 20%	At nominal input voltage and nominal LED voltage, full load.
Efficiency		-	> 70%	-	Efficiency is measured after driver has thermally stabilized + full load
Isolation	Meet UL1310/UL8750 for class 2 isolation power supply				


2. Output - specification

	Units	Minimum	Typical	Maximum	Notes
Output Voltage(Volt)	Vdc	16		23	
	mA		175		Adjustable current setting; please refer to the current setting table
Output Current Tolerance	%		±3		
Output Ripple Current		< 50% peak-to-peak of 175mA			<p>≤ 20% pk-to-pk of the rated output current for all models with Vout max ≥ 32V</p> <p>≤ 50% pk-to-pk of the rated output current for all models with Vout max ≤ 30V</p> <p>At nominal LED voltage and nominal input voltage without dimming</p>
Dimming Range	%	7%		100%	Please refer to Dimmer compatibility list
Star-up Time	ms		150		With nominal LED voltage and without dimmer attached
			200		With nominal LED voltage, with an recommended dimmer attached(see dimmer compatibility list) and at the full dimming conduction angle
Isolation	Meet UL1310/UL8750 for class 2 isolation power supply				
Operation Case Temperature	°C	-30		80	


3. EMC / Protection / Compliance

Conducted and Radiated EMI		FCC CFR Title 47 Part 15 Class B and EN55022(CISPR 22) Class B compliant			
Immunity Compliance	ESD (Electrostatic Discharge)	IEC61000-4-2	6 kV contact discharge, 8 kV air discharge, level 3		
	Electrical Fast Transient	IEC61000-4-4	±2 kV on AC power port for 1 minute, ±1kV on signal/control lines		
	Surge	IEC61000-4-5	±1kV line to line/±2kV line to earth on AC power port, ±0.5kV for outdoor cables		
Transient Protection	Ring Wave		ANSI/IEEE c62.41-1-2002 & c62.41-2-2002 category A, 2.5kV ring wave		

THD of the driver VS Power Output (W)

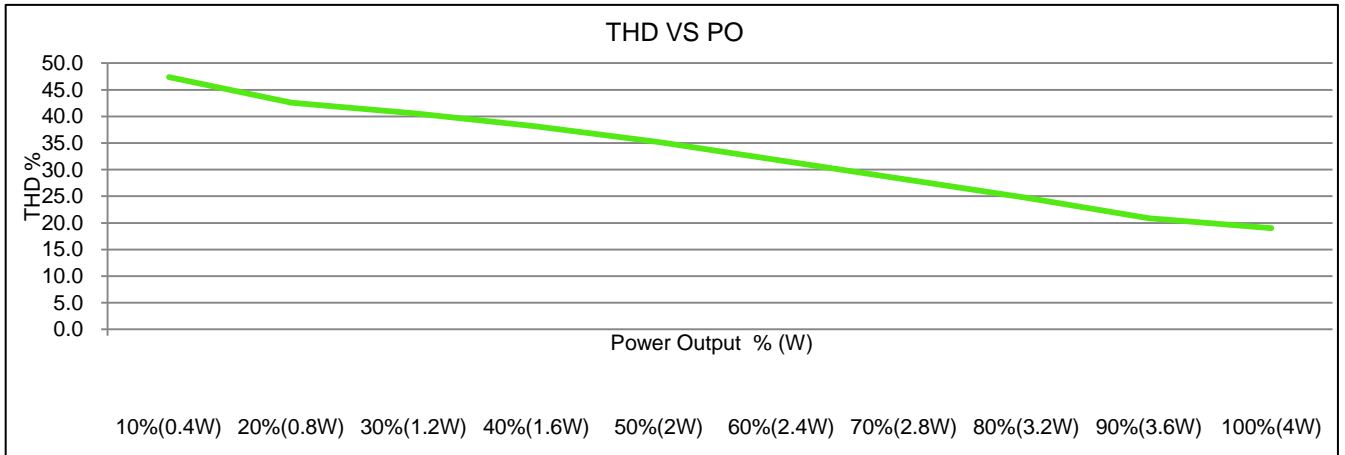

Efficiency of the driver VS Power Output (W)

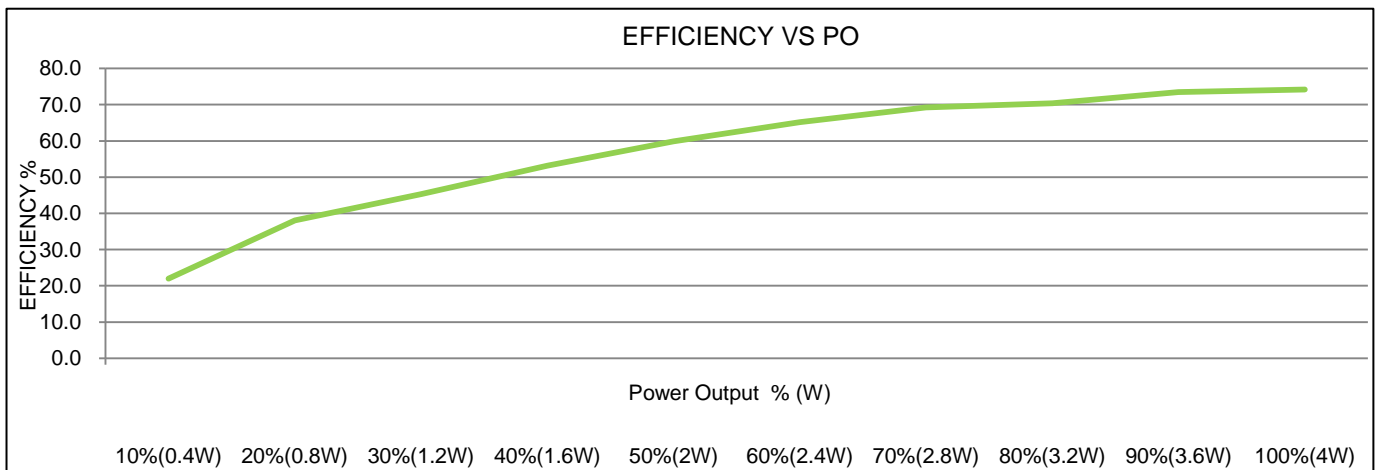


Macron Associate Co. – Power Supply Team

NO.352, Peng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com

A0416

Power Factor VS Power Output (W):

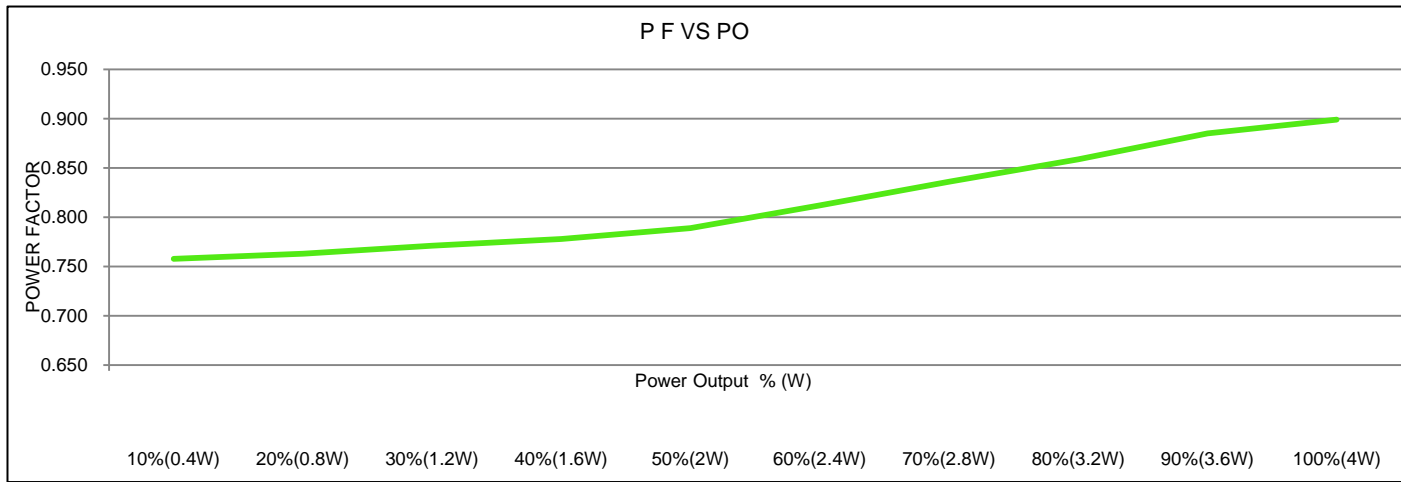

Macron Associate Co. – Power Supply Team

NO.352, Peng-Yi Road, Taiping, Taichung, Taiwan 411

TEL: 886-4-22708357 FAX: 886-4-22767307 Email: macron@macrongroup.com

A0416